



<b>DATA SHEET</b>		Date	27-Jul-21
Model	WBA350B-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Natsuno

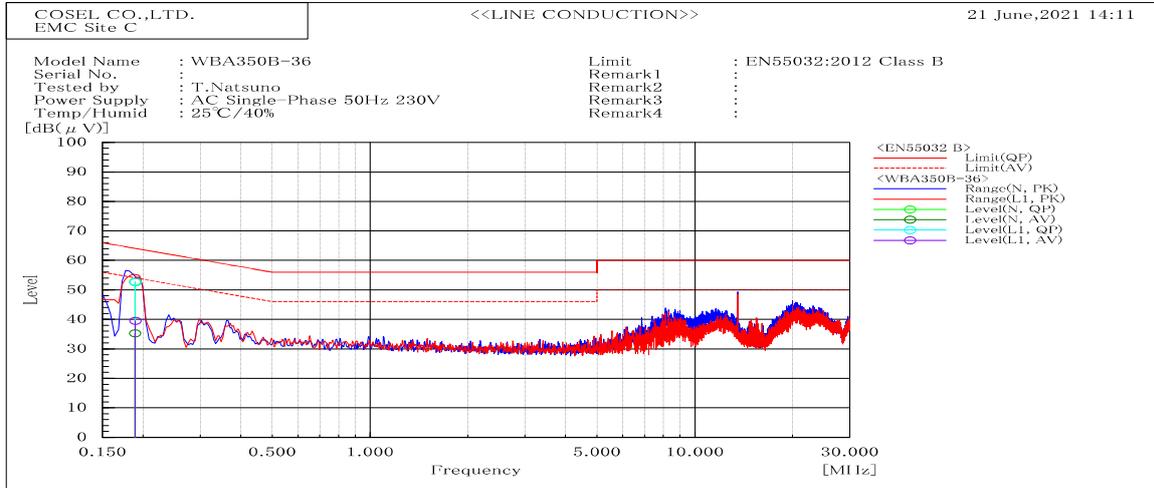


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
		0.189	L1	52.7	39.5	64.1	54.1		
0.189	N	52.7	35.3	64.1	54.1	11.4	18.8	Pass	

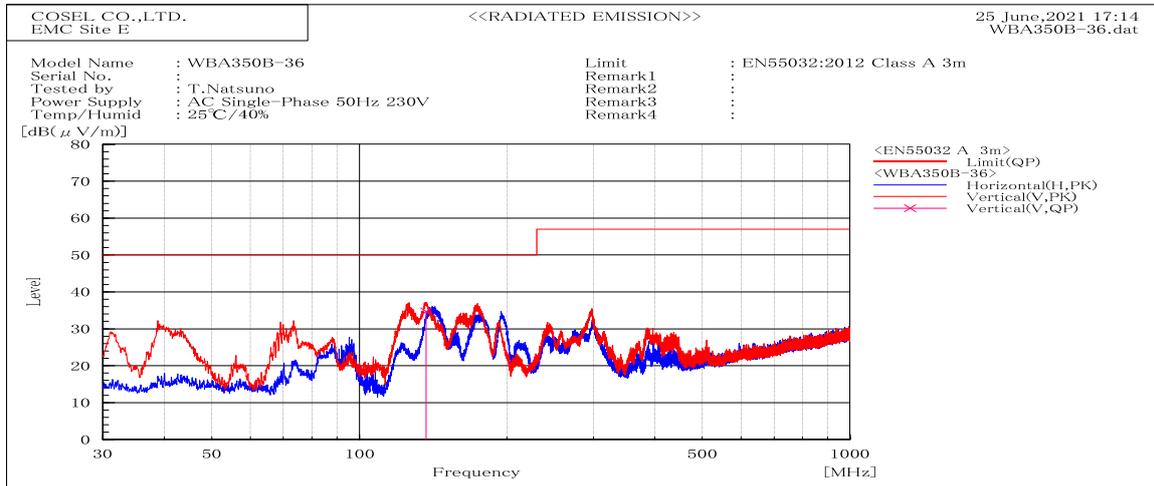


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)		Margin dB		Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP	QP						
136.805	V	Stable	34.7	50	50	50	15.3	Pass	100	335.5		

DATA SHEET		Date	27-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Natsuno

**1. Line conduction**

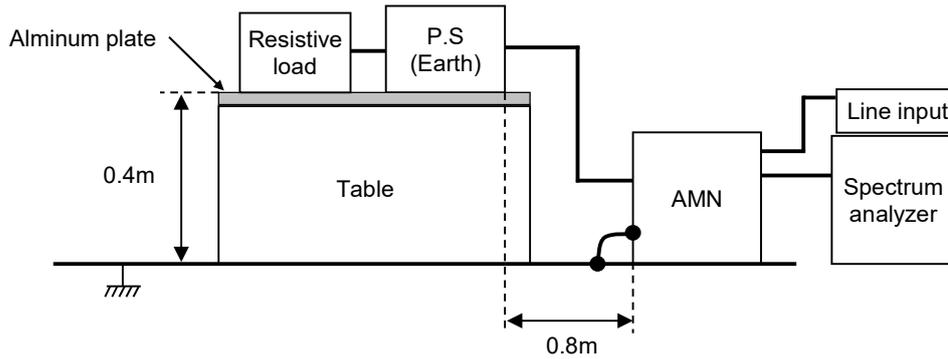

**2. Radiated emission**

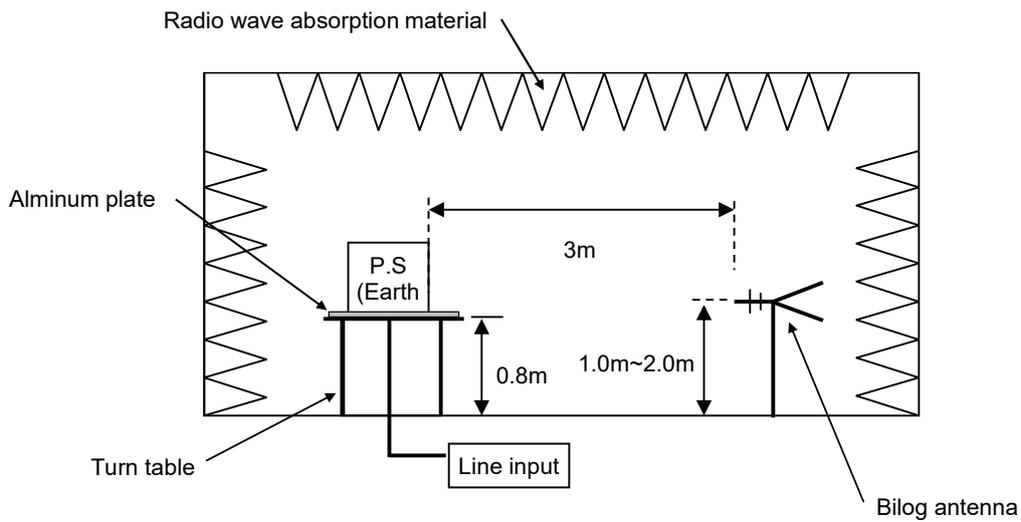

**Conditions**

Test : EMI  
 Model Name: WBA350B

○ Photographs of Test Set-Up

**1. LINE CONDUCTION**



**2. RADIATED EMISSION**

