



DATA SHEET		Date	16-Jul-21
Model	WBA35B-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi T.Natsuno

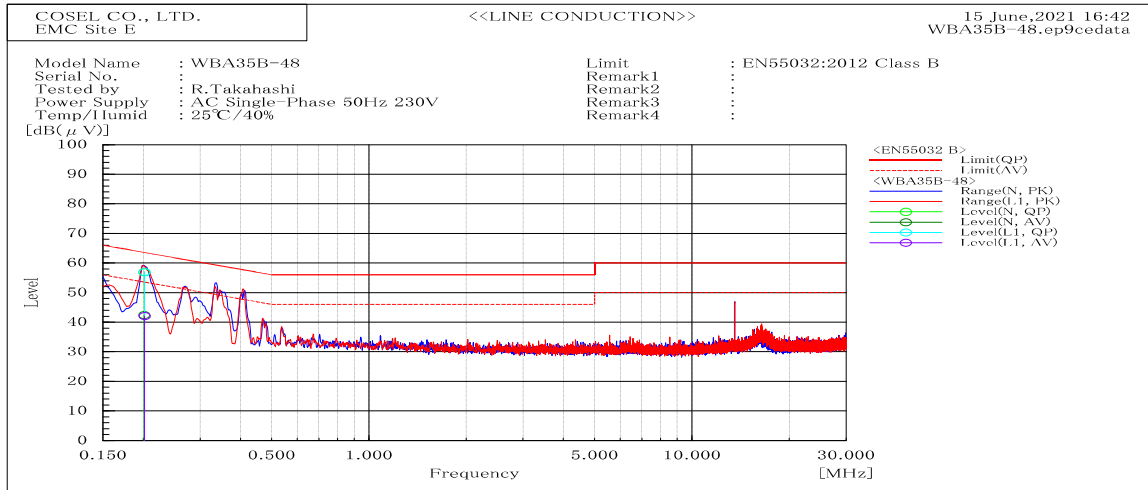


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.202	L1	56.9	42.1	63.5	53.5	6.6	11.4	Pass	
0.201	N	56.9	42.4	63.6	53.6	6.7	11.2	Pass	

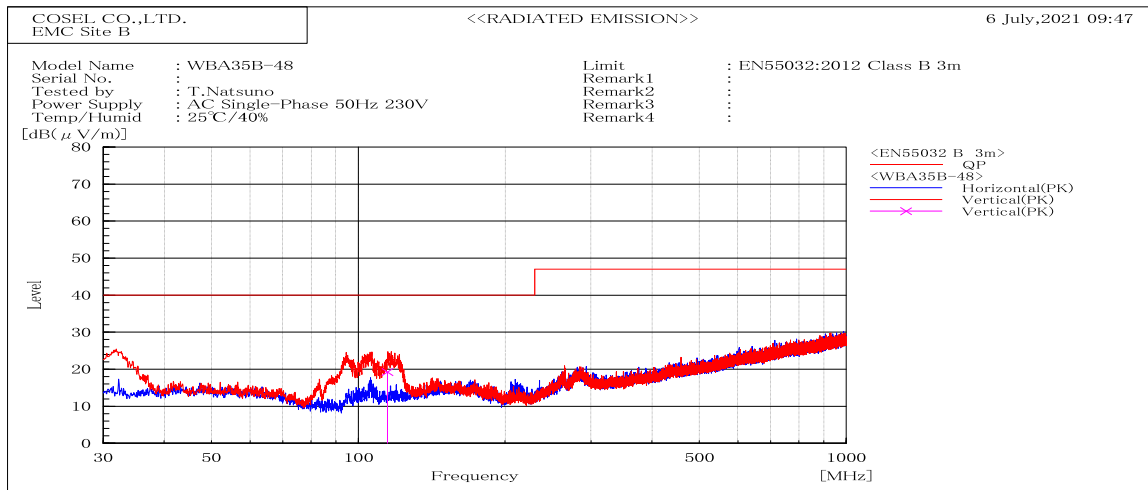


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
114.684	V	Stable	19.2	40	20.8	Pass	100	12.4	

DATA SHEET		Date	16-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi T.Natsuno

## 1. Line conduction

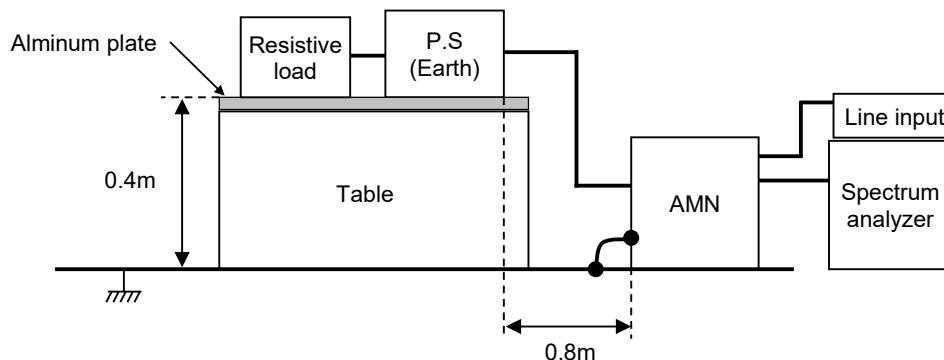

## 2. Radiated emission

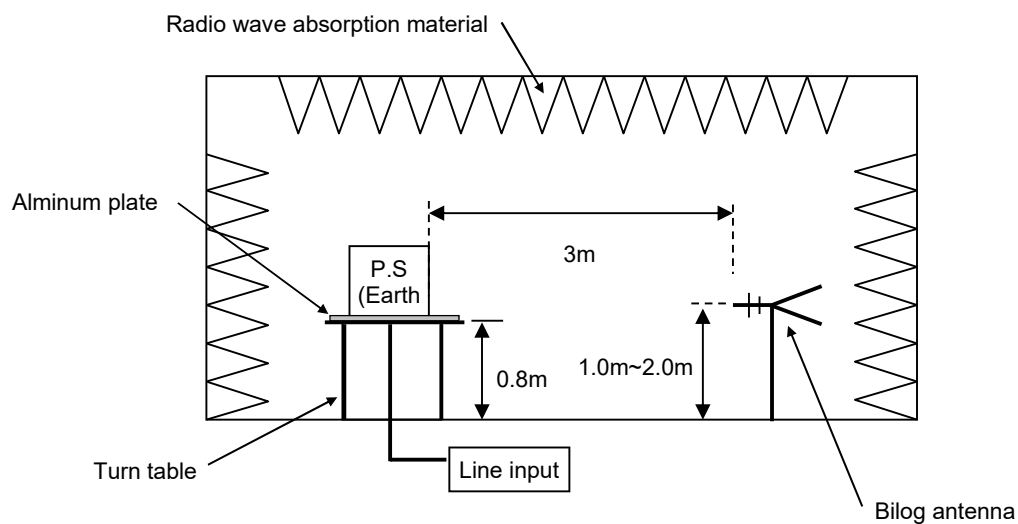


## Conditions

Test : EMI  
Model Name: WBA35B

## ○Photographs of Test Set-Up

### 1. LINE CONDUCTION

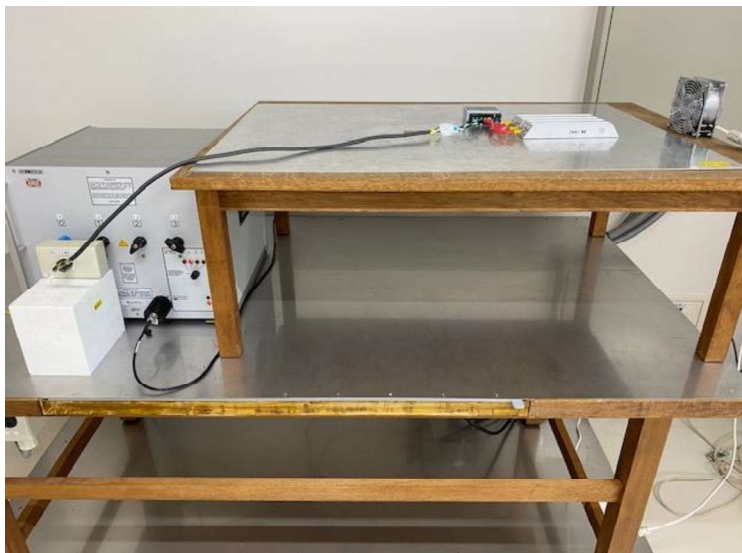

### 2. RADIATED EMISSION

