



DATA SHEET		Date	14-May-25
Model	WDA120F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

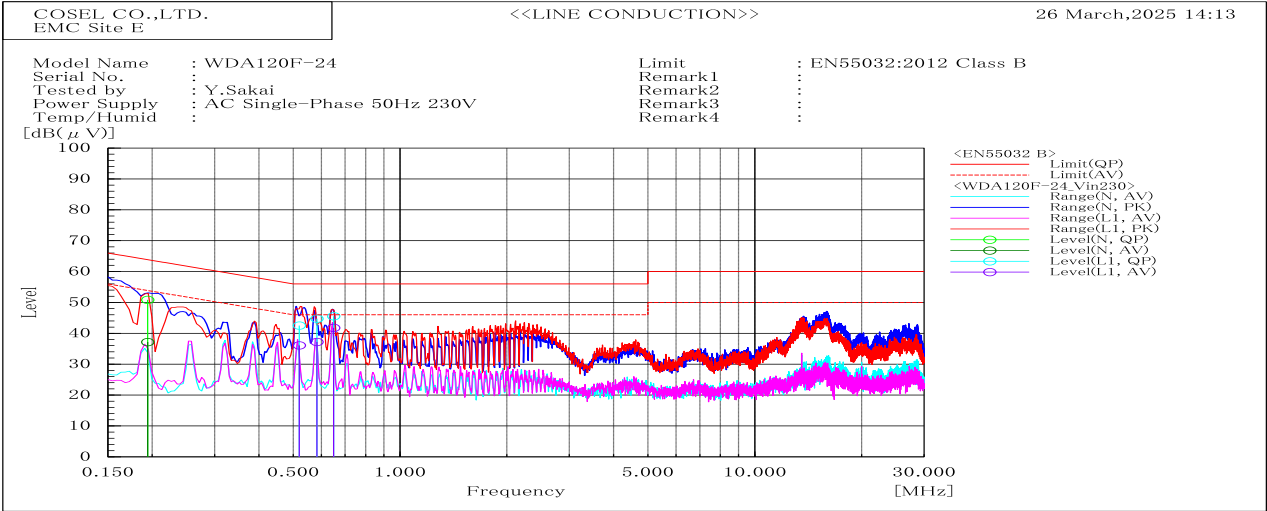


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.52	L1	42.5	36.1	56	46	13.5	9.9	Pass	
0.65	L1	45.5	41.8	56	46	10.5	4.2	Pass	
0.583	L1	44.8	37.2	56	46	11.2	8.8	Pass	
0.194	N	50.8	37.2	63.9	53.9	13.1	16.7	Pass	

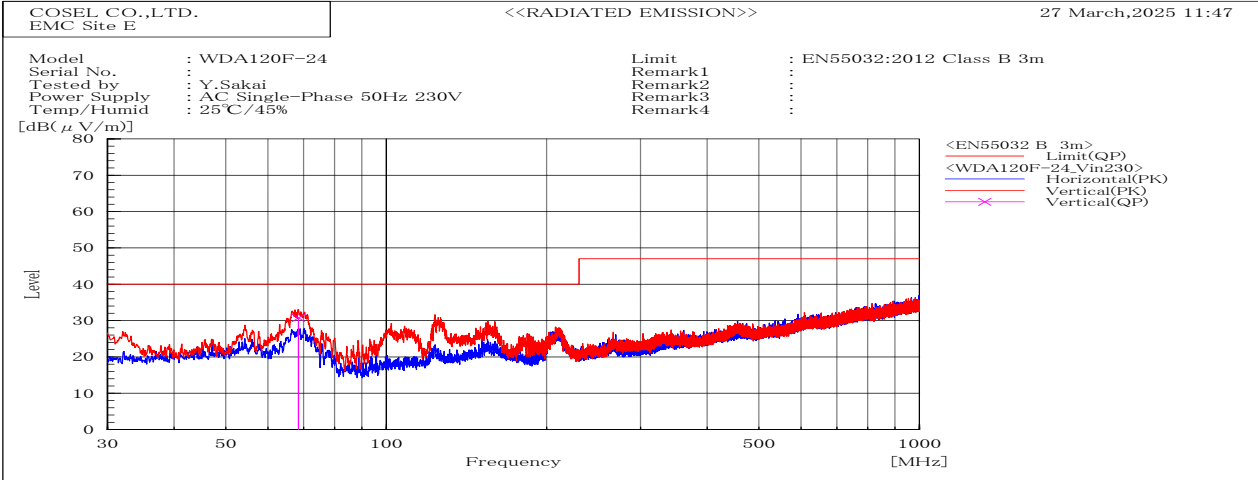


Frequency MHz	Polarization	Stability	Factor dB(1/m)	Level	Limit	Margi	Pass/ Fail	Height cm	Angle deg	Remark
				dB(uV/m)	dB(uV/m)	n dB				
68.422	V	Stable	-6.8	30.7	40	9.3	Pass	100	67.8	

DATA SHEET		Date	14-May-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

1. Line conduction

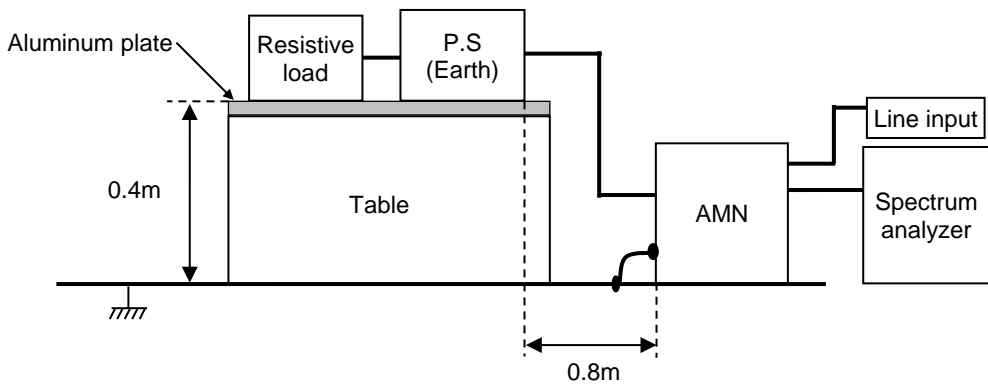

2. Radiated emission

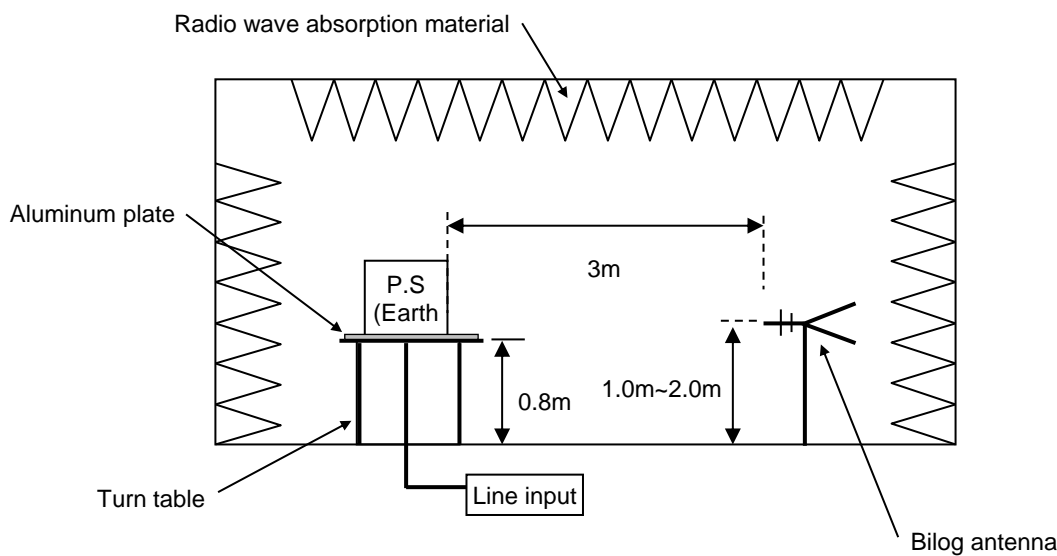


Conditions

Test : EMI  
Model Name: WDA120F-24

○Photographs of Test Set-Up

1. LINE CONDUCTION

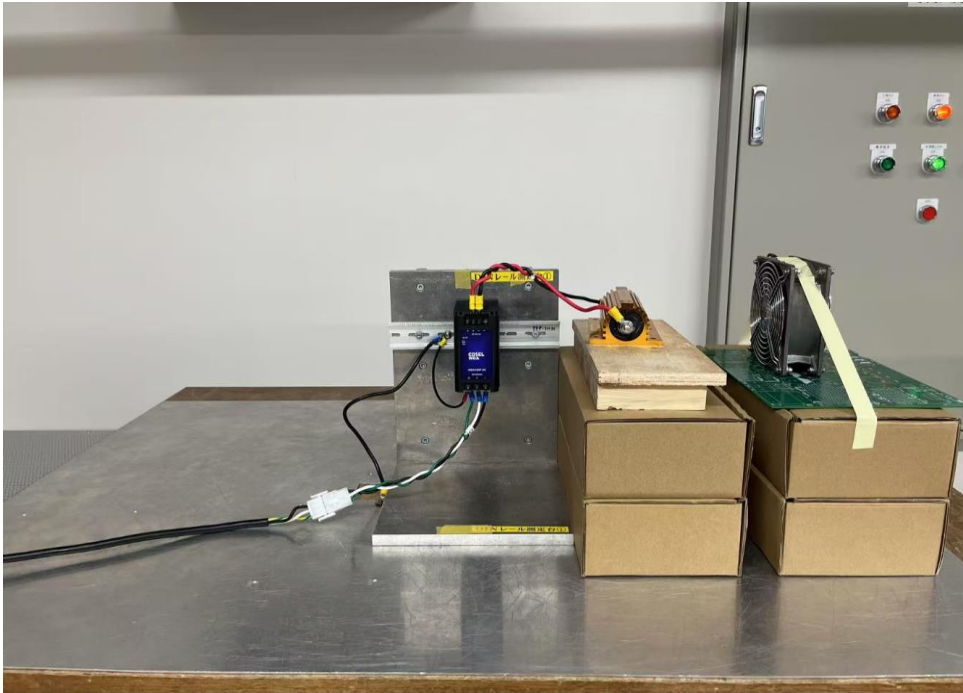

2. RADIATED EMISSION

