



DATA SHEET		Date	06-Sep-22
Model	WDA30F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

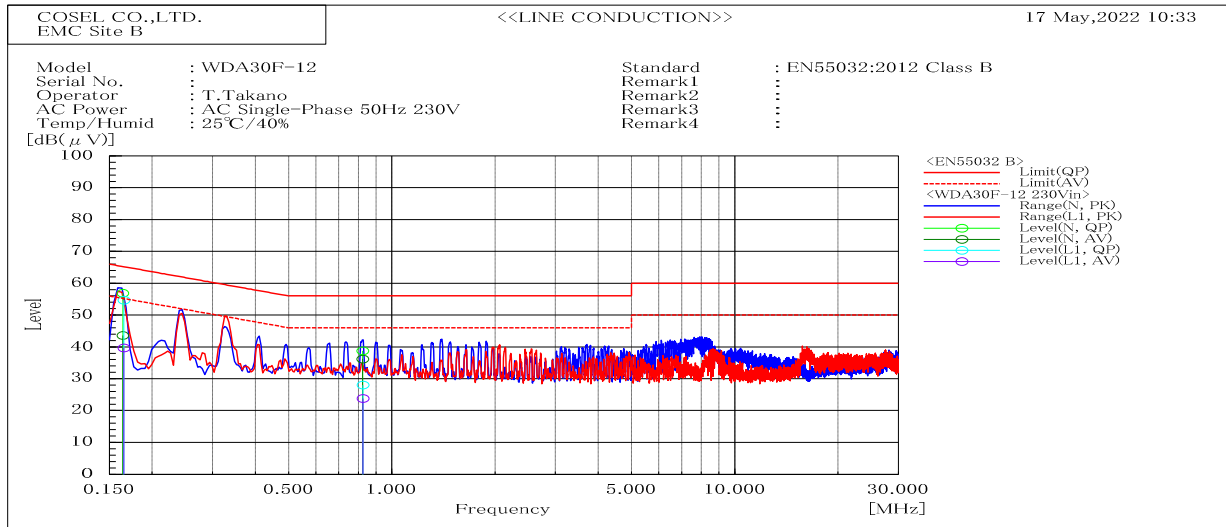


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.164	N	56.8	43.6	65.2	55.2	8.4	11.6	Pass	
0.823	N	38.7	36.2	56	46	17.3	9.8	Pass	
0.166	L1	54.7	39.7	65.2	55.2	10.5	15.5	Pass	
0.824	L1	28	23.8	56	46	28	22.2	Pass	

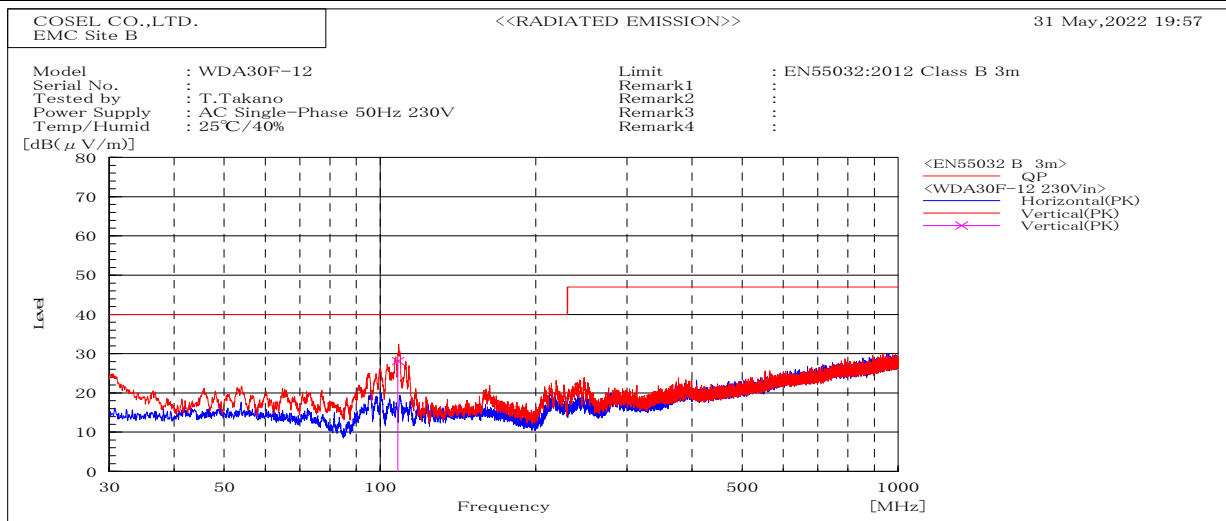

Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
108.272	V	Stable	28.1	40	11.9	Pass	100	319.6		

DATA SHEET		Date	06-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

1. Line conduction

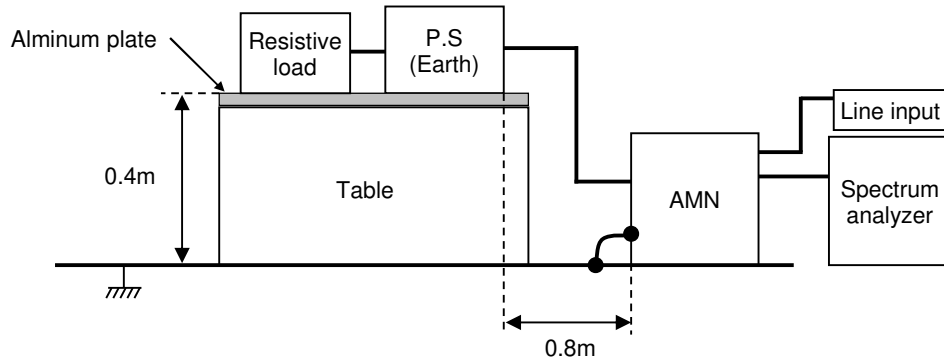

2. Radiated emission

