



DATA SHEET		Date	06-Sep-22
Model	WDA30F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

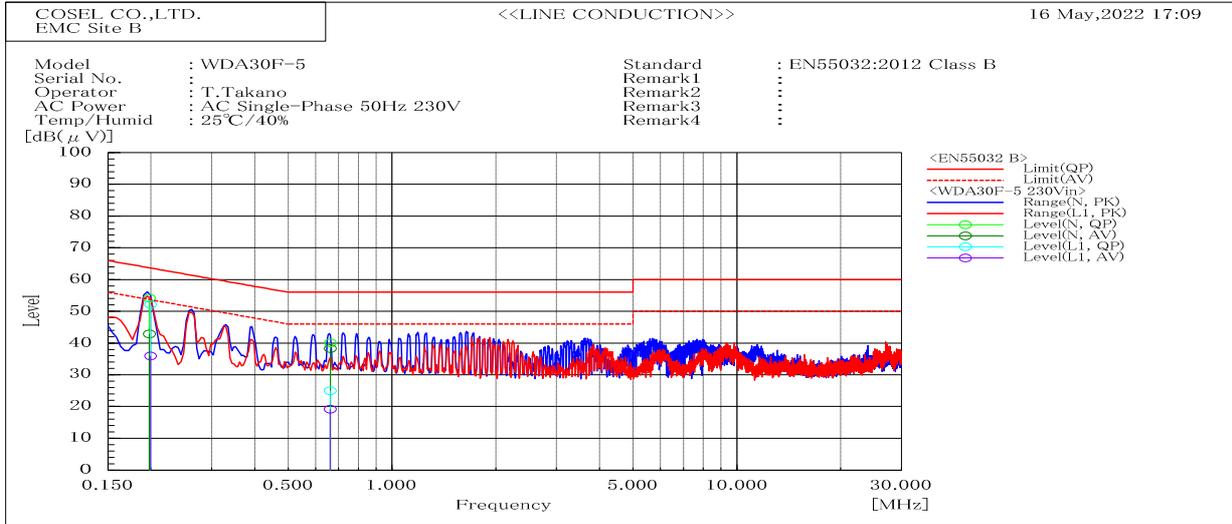


Frequency MHz	Line	Level		Limit		Margin		Pass/Fail	Remark
		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.198	N	54.1	42.9	63.7	53.7	9.6	10.8	Pass	
0.662	N	40.1	38.3	56	46	15.9	7.7	Pass	
0.199	L1	52.2	35.9	63.6	53.6	11.4	17.7	Pass	
0.662	L1	25	19.2	56	46	31	26.8	Pass	

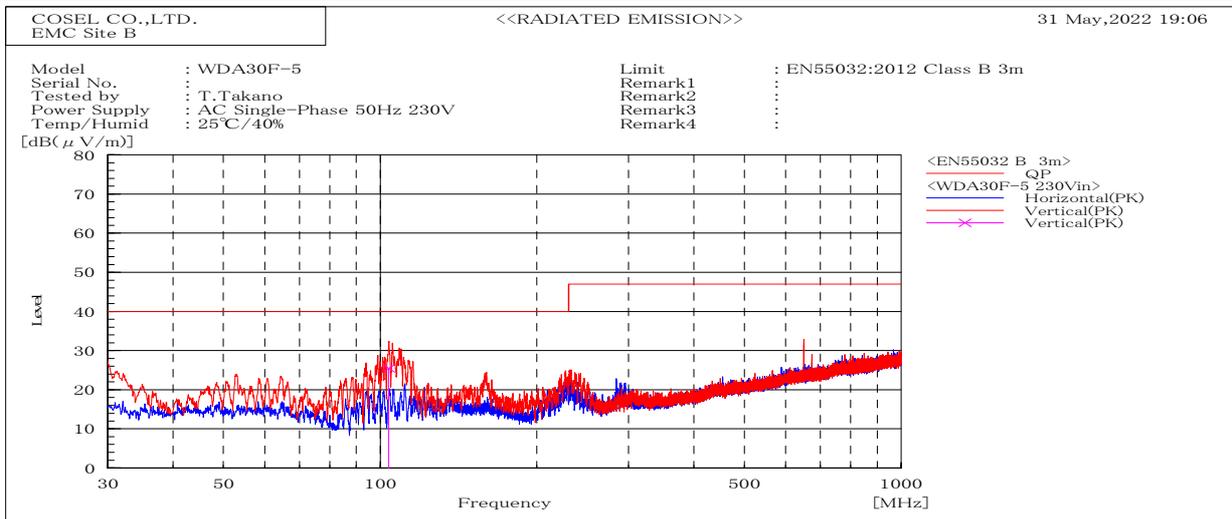

Frequency MHz	Polarization	Stability	Level		Limit		Margin		Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m)		dB(μV/m)		dB					
			QP	AV	QP	AV	QP	AV				
103.862	V	Stable	25.4		40		14.6		Pass	124.9	324.5	

DATA SHEET		Date	06-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

1. Line conduction

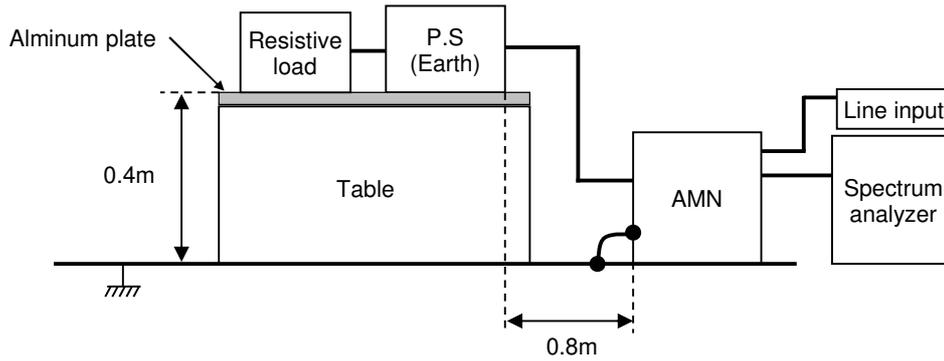

2. Radiated emission

