


WMA100F-48 Expected Life (Aluminum electrolytic capacitor)

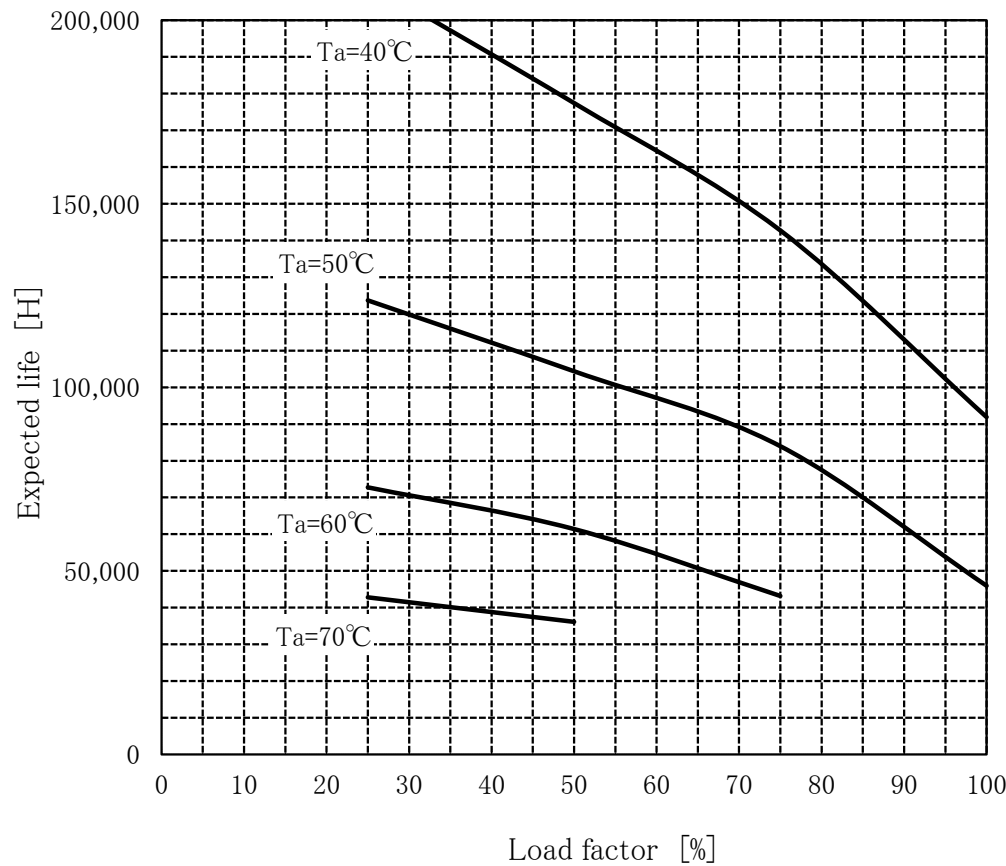

- Above expected life time is calculated according our calculation standard.
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature.

Conditions

- (1)Input voltage
- (2)Output voltage/
current

AC100-264V 60Hz

DC OUTPUT	Load factor			
	100%	75%	50%	25%
48V	2.1A	1.575A	1.05A	0.525A

- (3)Cooling method Forced air
- (4)Mounting method Refer below

