



DATA SHEET		Date	28-Nov-19
Model	WMA150H-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

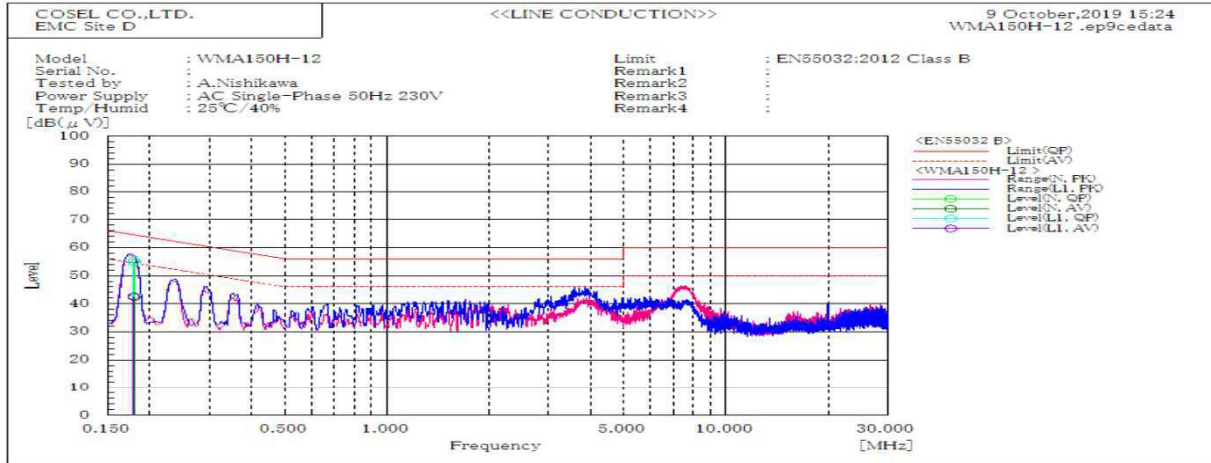


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.179	L1	55.5	42.6	64.5	54.5	9	11.9	Pass	
0.18	N	54.8	42.3	64.5	54.5	9.7	12.2	Pass	

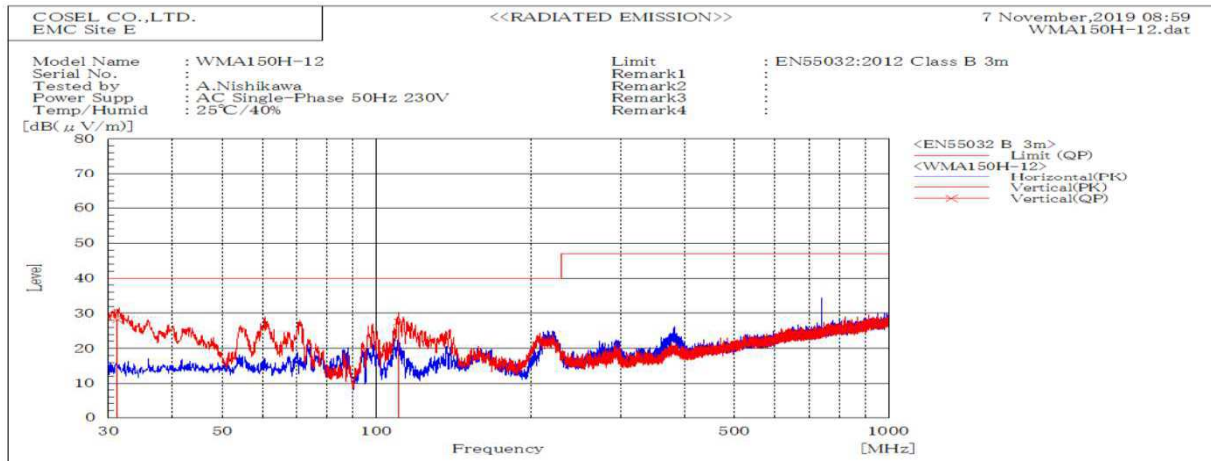


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
31.229	V	Stable	28.2	40	11.8	Pass	100	0	
110.724	V	Stable	27.5	40	12.5	Pass	100	325.1	

DATA SHEET		Date	28-Nov-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

## 1. Line conduction

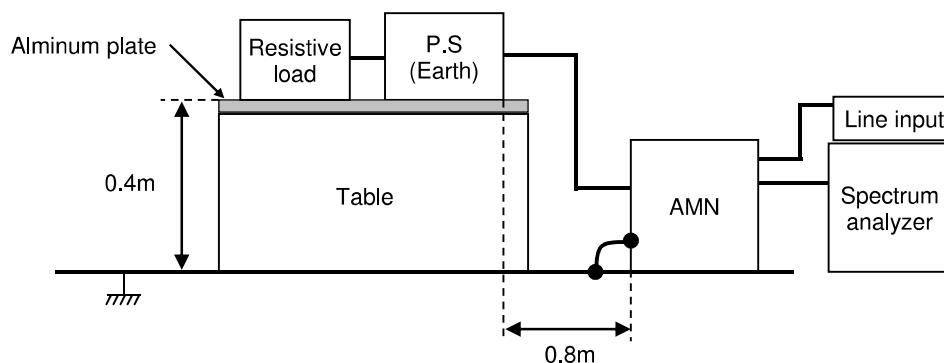

## 2. Radiated emission

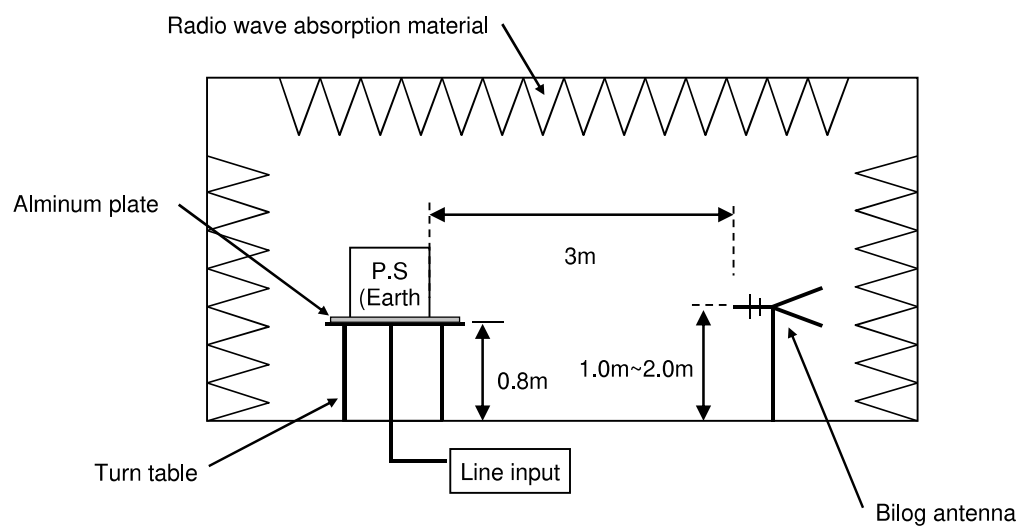

## Conditions

Test : EMI  
Model Name: WMA150H-12

Photographs of Test Set-Up

### 1. LINE CONDUCTION



### 2. RADIATED EMISSION

