



DATA SHEET		Date	28-Nov-19
Model	WMA150H-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

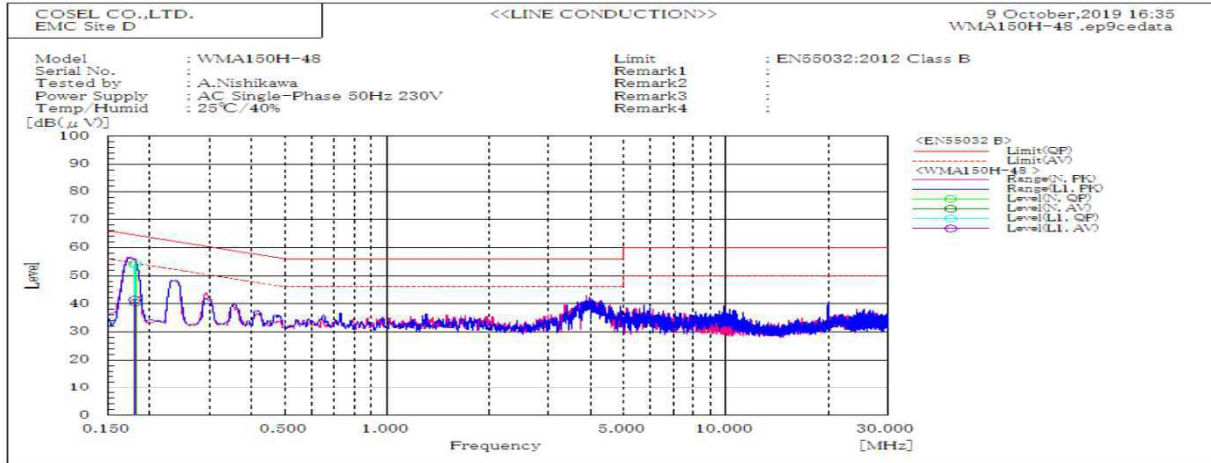


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.181	L1	54.2	41.5	64.5	54.5	10.3	13	Pass	
0.181	N	54.3	40.4	64.4	54.4	10.1	14	Pass	

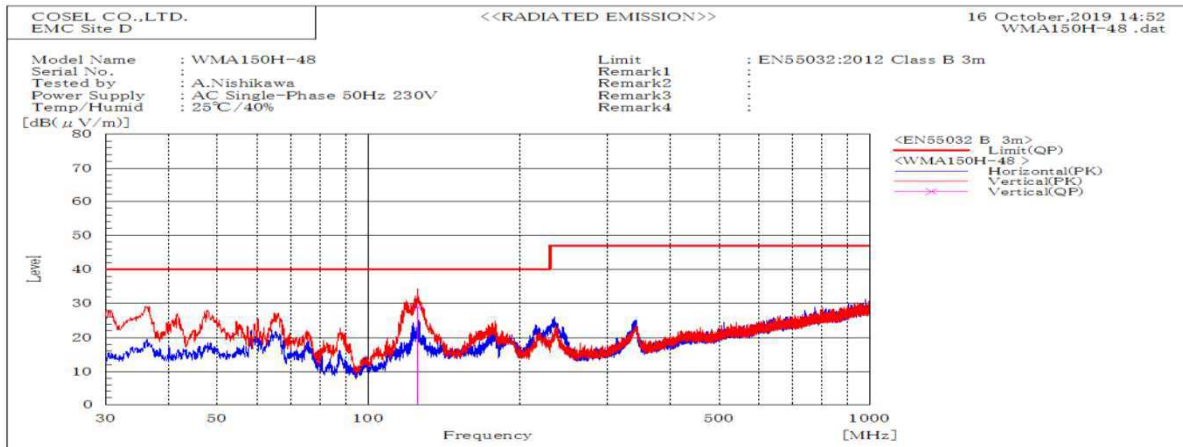


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
125.191	V	Stable	28.9	40	11.1	Pass	100	199.8	

DATA SHEET		Date	28-Nov-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

1. Line conduction

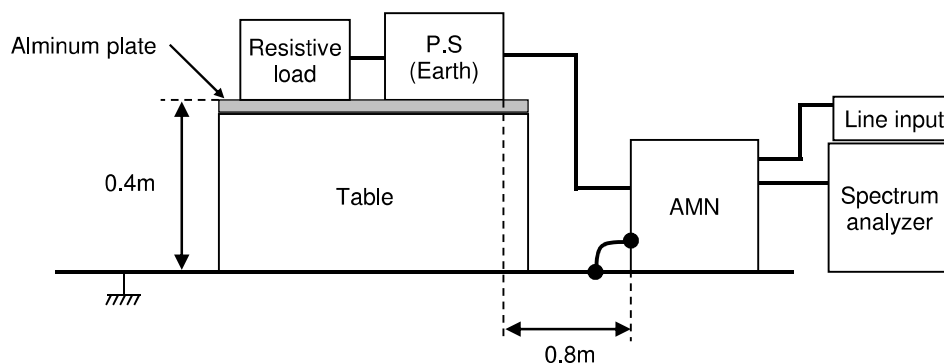

2. Radiated emission

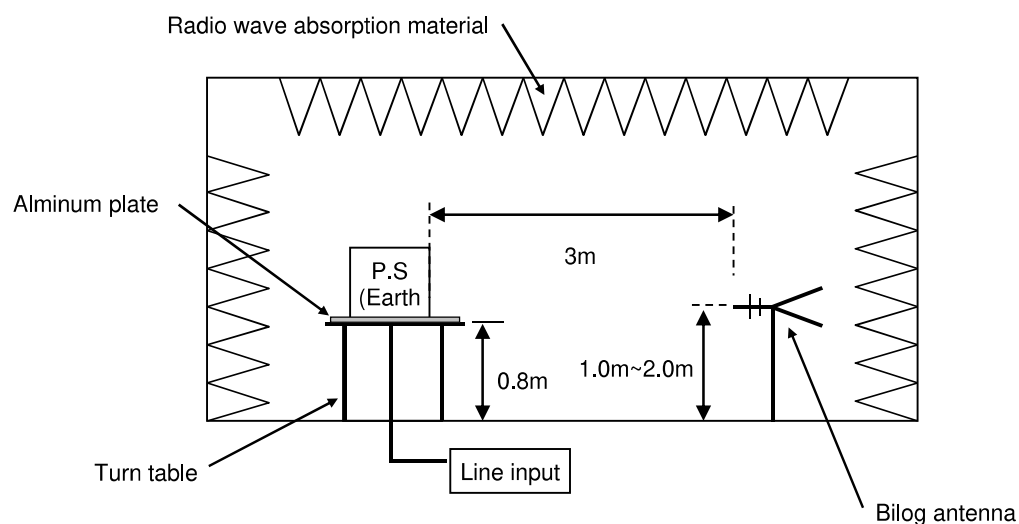

Conditions

Test : EMI
Model Name: WMA150H-48

Photographs of Test Set-Up

1. LINE CONDUCTION



2. RADIATED EMISSION

