



DATA SHEET		Date	05-Nov-20
Model	WMA35F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

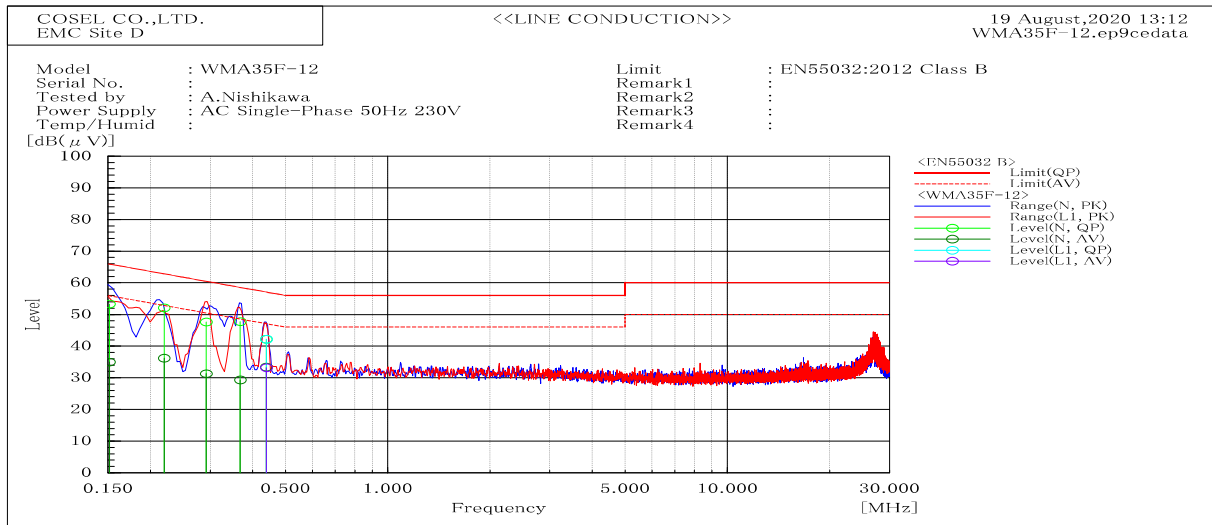


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.44	L1	42.2	33.2	57.1	47.1	14.9	13.9	Pass	
0.439	N	42.2	33.4	57.1	47.1	14.9	13.7	Pass	
0.292	N	47.6	31.3	60.5	50.5	12.9	19.2	Pass	
0.368	N	47.7	29.3	58.5	48.5	10.8	19.2	Pass	
0.152	N	53.3	35	65.9	55.9	12.6	20.9	Pass	
0.219	N	52.1	36.2	62.8	52.8	10.7	16.6	Pass	

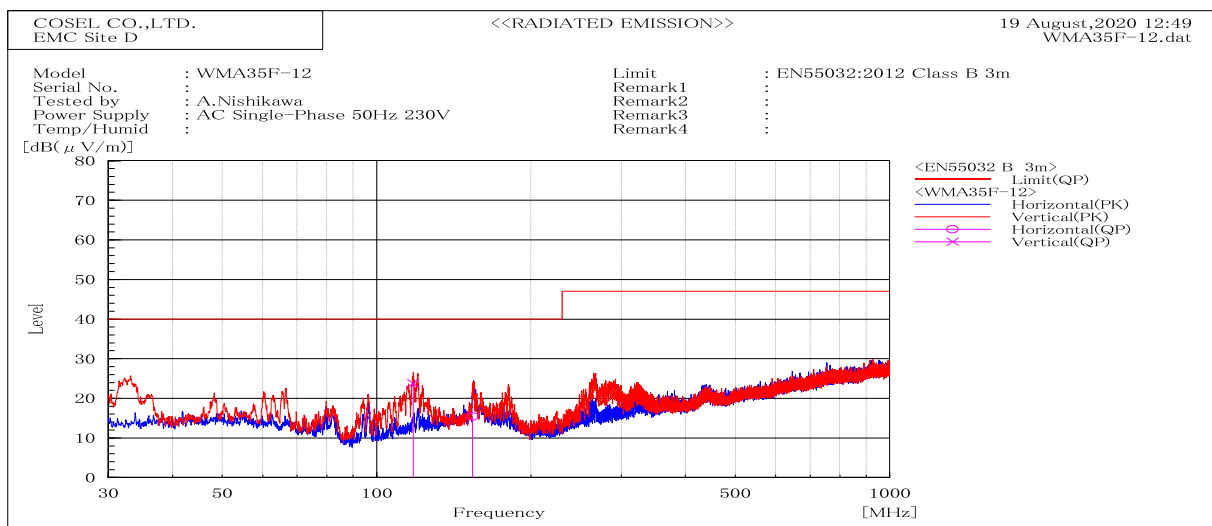


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
153.796	H	Stable	15.4	40	24.6	Pass	167.4	314.2	
117.846	V	Stable	23.8	40	16.2	Pass	103	280.3	

DATA SHEET		Date	05-Nov-20
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

1. Line conduction

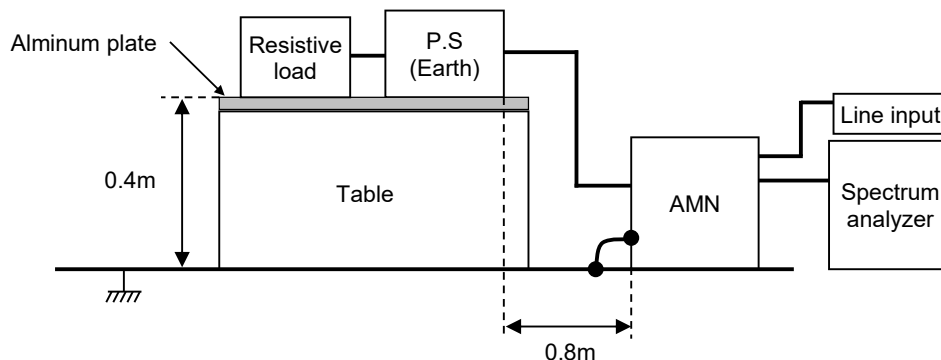

2. Radiated emission

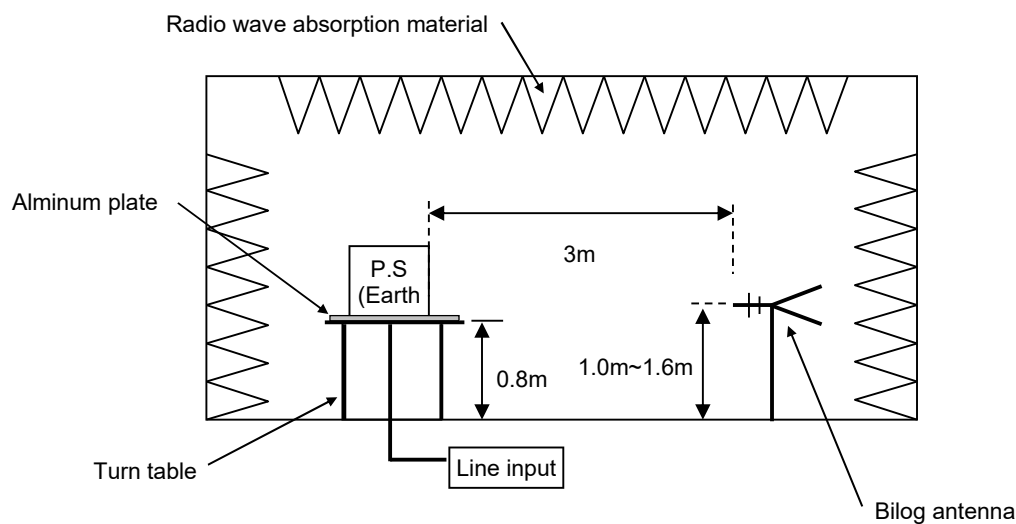

Conditions

Test : EMI
Model Name: WMA35F-12

Photographs of Test Set-Up

1. LINE CONDUCTION



2. RADIATED EMISSION

