



DATA SHEET		Date	05-Nov-20
Model	WMA75F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

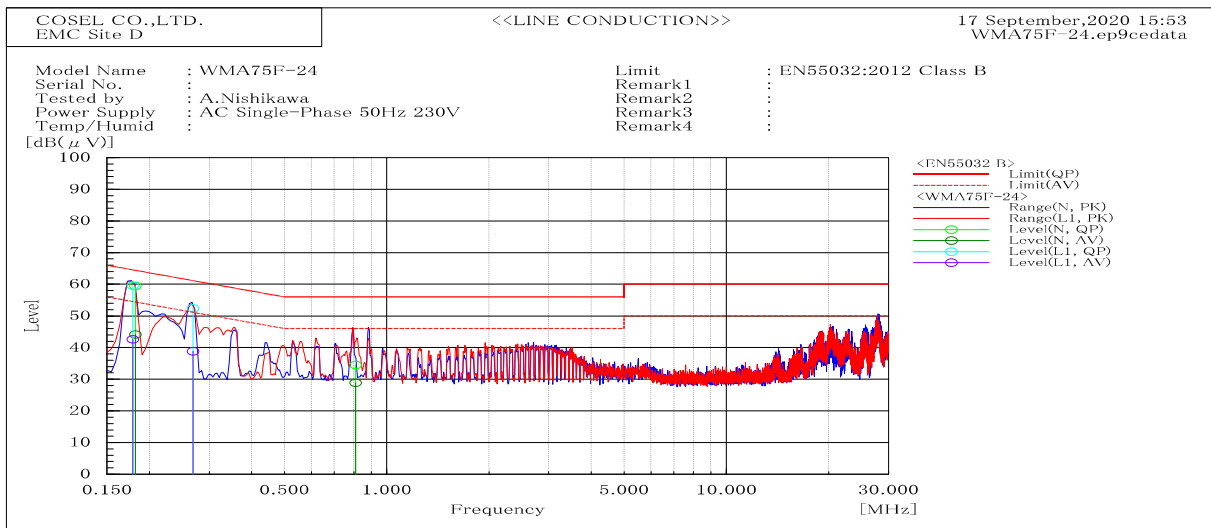


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.269	L1	52.4	38.8	61.2	51.2	8.8	12.4	Pass	
0.179	L1	59.6	42.6	64.5	54.5	4.9	11.9	Pass	
0.182	N	59.5	44.1	64.4	54.4	4.9	10.3	Pass	
0.809	N	34.5	28.9	56	46	21.5	17.1	Pass	

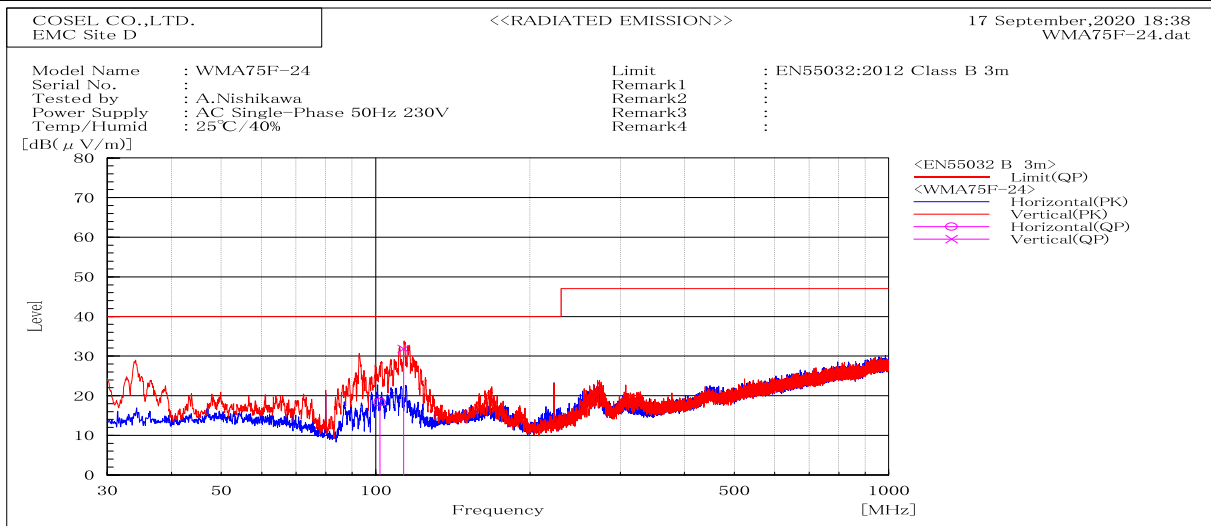


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
113.327	V	Stable	31.8	40	8.2	Pass	100.2	127.9	
101.918	H	Stable	18.4	40	21.6	Pass	200	312.6	

DATA SHEET		Date	05-Nov-20
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

1. Line conduction

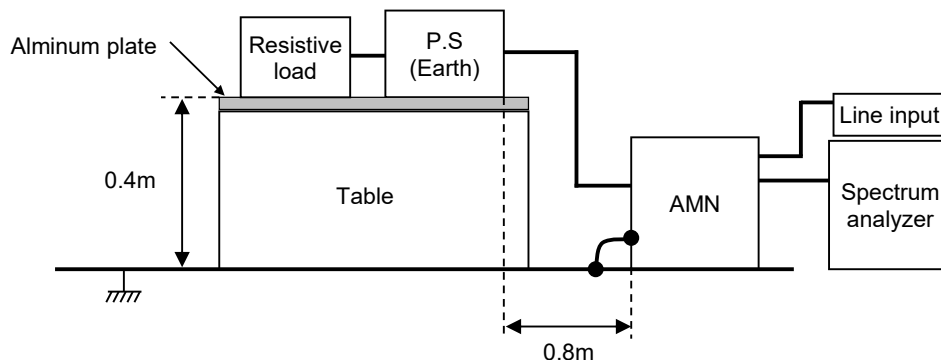

2. Radiated emission

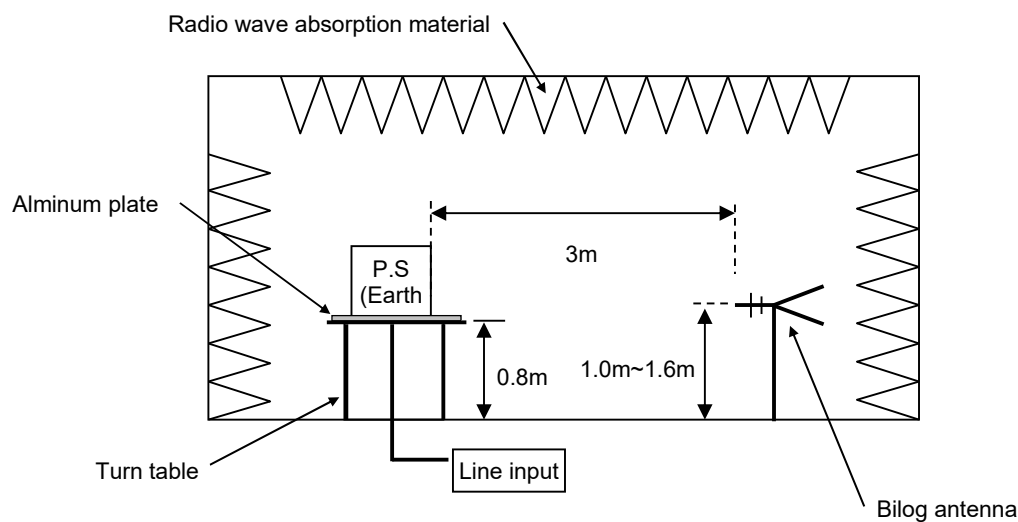


Conditions

Test : EMI
Model Name: WMA75F-24

Photographs of Test Set-Up

1. LINE CONDUCTION

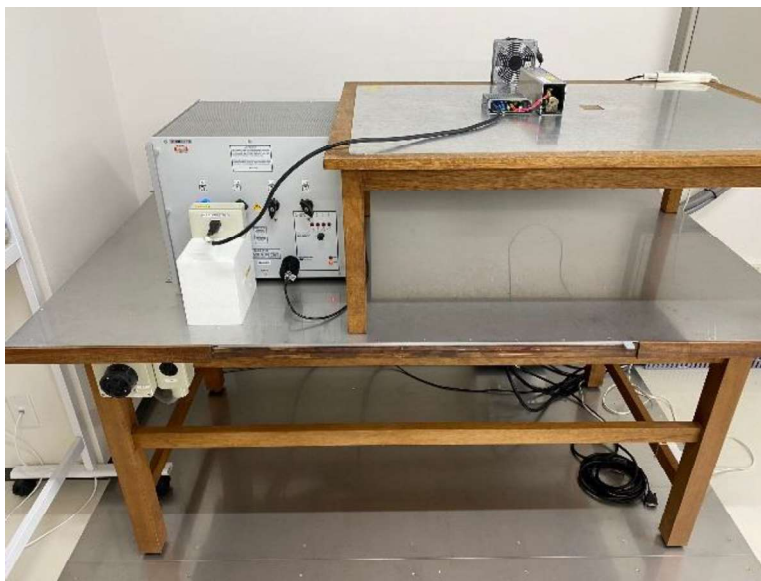

2. RADIATED EMISSION

