



TEST DATA OF ZUS100505 (5.0V INPUT)

Regulated DC Power Supply

Date : Sep 21. 1996

Approved by : T. Sugimori
Design Manager

Prepared by : M. Takashima
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	5
リップルノイズ	
6. Overcurrent Protection	6
過電流保護	
7. Dynamic Load Responce	7
動的負荷変動	
8. Rise and Fall Time	8
立上り、立下がり時間	
9. Ambient Temperature Drift	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	12
経時ドリフト	
13. Output Voltage Accuracy	13
定電圧精度	
14. Condensation	14
結露特性	
15. Figure of Testing Circuitry	15
測定回路図	

(Final Page 15)

COSEL


Model ZUS100505

Item Line Regulation 静的入力変動

Object +5V1.6A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

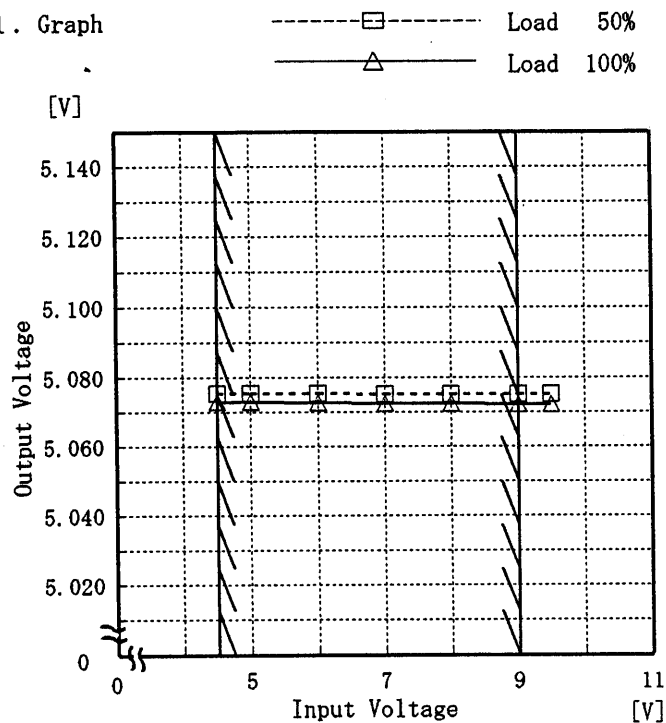

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
4.5	5.075	5.073
5.0	5.075	5.073
6.0	5.075	5.073
7.0	5.075	5.072
8.0	5.075	5.072
9.0	5.075	5.072
9.5	5.075	5.072
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

COSEL


Model ZUS100505

Item Efficiency 効率

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph

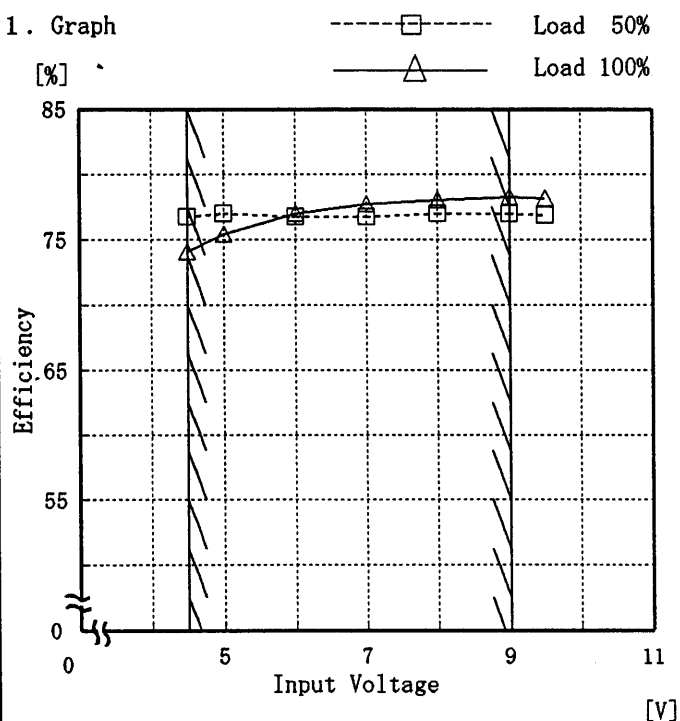

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
4.5	76.8	74.1
5.0	77.0	75.4
6.0	76.7	77.0
7.0	76.7	77.7
8.0	77.0	78.0
9.0	77.0	78.3
9.5	76.8	78.2
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

COSEL


Model	ZUS100505	Temperature	25°C																																																
Item	Load Regulation 静的負荷変動	Testing Circuitry	Figure A																																																
Object	+5V1.600A																																																		
1. Graph	<div> <div>△</div> Input Volt. 4.5V <div>□</div> Input Volt. 5.0V <div>○</div> Input Volt. 9.0V </div> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>	2. Values																																																	
		<table> <tr> <th></th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr> <tr> <th>Load Current [A]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> <tr><td>0.00</td><td>5.077</td><td>5.077</td><td>5.077</td></tr> <tr><td>0.30</td><td>5.076</td><td>5.076</td><td>5.075</td></tr> <tr><td>0.60</td><td>5.075</td><td>5.075</td><td>5.074</td></tr> <tr><td>0.90</td><td>5.074</td><td>5.074</td><td>5.073</td></tr> <tr><td>1.20</td><td>5.073</td><td>5.073</td><td>5.072</td></tr> <tr><td>1.50</td><td>5.072</td><td>5.072</td><td>5.071</td></tr> <tr><td>1.60</td><td>5.072</td><td>5.072</td><td>5.071</td></tr> <tr><td>1.76</td><td>5.071</td><td>5.071</td><td>5.071</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Load Current [A]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	5.077	5.077	5.077	0.30	5.076	5.076	5.075	0.60	5.075	5.075	5.074	0.90	5.074	5.074	5.073	1.20	5.073	5.073	5.072	1.50	5.072	5.072	5.071	1.60	5.072	5.072	5.071	1.76	5.071	5.071	5.071	—	—	—	—	—	—	—	—	
	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]																																																
Load Current [A]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																
0.00	5.077	5.077	5.077																																																
0.30	5.076	5.076	5.075																																																
0.60	5.075	5.075	5.074																																																
0.90	5.074	5.074	5.073																																																
1.20	5.073	5.073	5.072																																																
1.50	5.072	5.072	5.071																																																
1.60	5.072	5.072	5.071																																																
1.76	5.071	5.071	5.071																																																
—	—	—	—																																																
—	—	—	—																																																

COSEL

Model	ZUS100505
Item	Ripple Voltage (by Load Current) リップル電圧 (負荷電流特性)
Object	+5V1.6A

Temperature 25°C
Testing Circuitry Figure A

1. Graph
- Input Volt. 4.5V
 -----△----- Input Volt. 9.0V

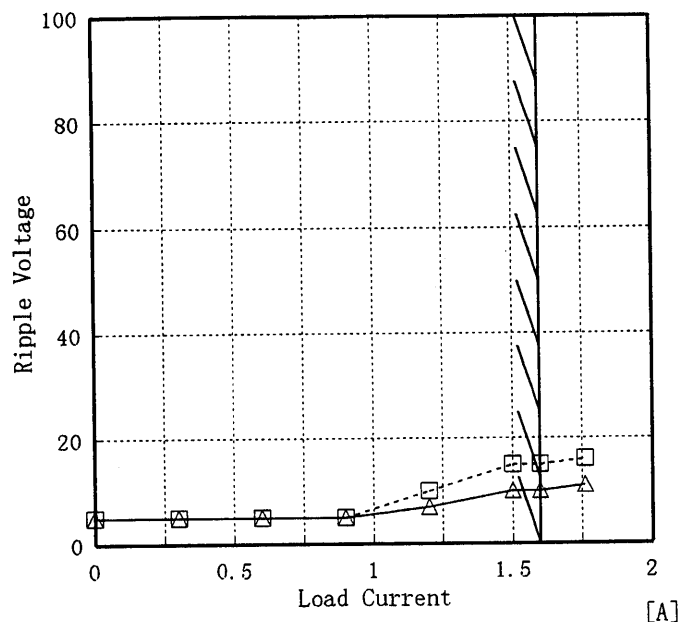

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期
T2: Due to Switching
スイッチング周期

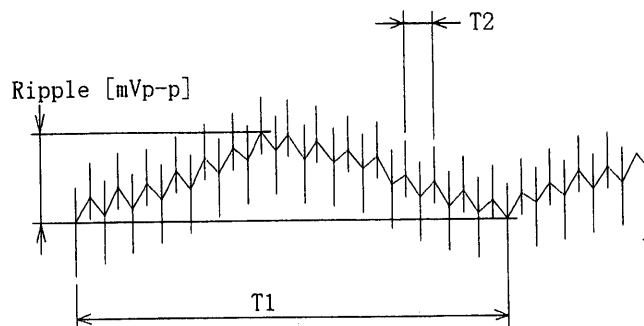



Fig. Complex Ripple Wave Form

図 リップル波形詳細図

2. Values

Load Current [A]	Input Volt. 4.5 [V]	Input Volt. 9.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.0	5	5
0.3	5	5
0.6	5	5
0.9	5	5
1.2	10	7
1.5	15	10
1.6	15	10
1.8	16	11
—	—	—
—	—	—
—	—	—

COSEL

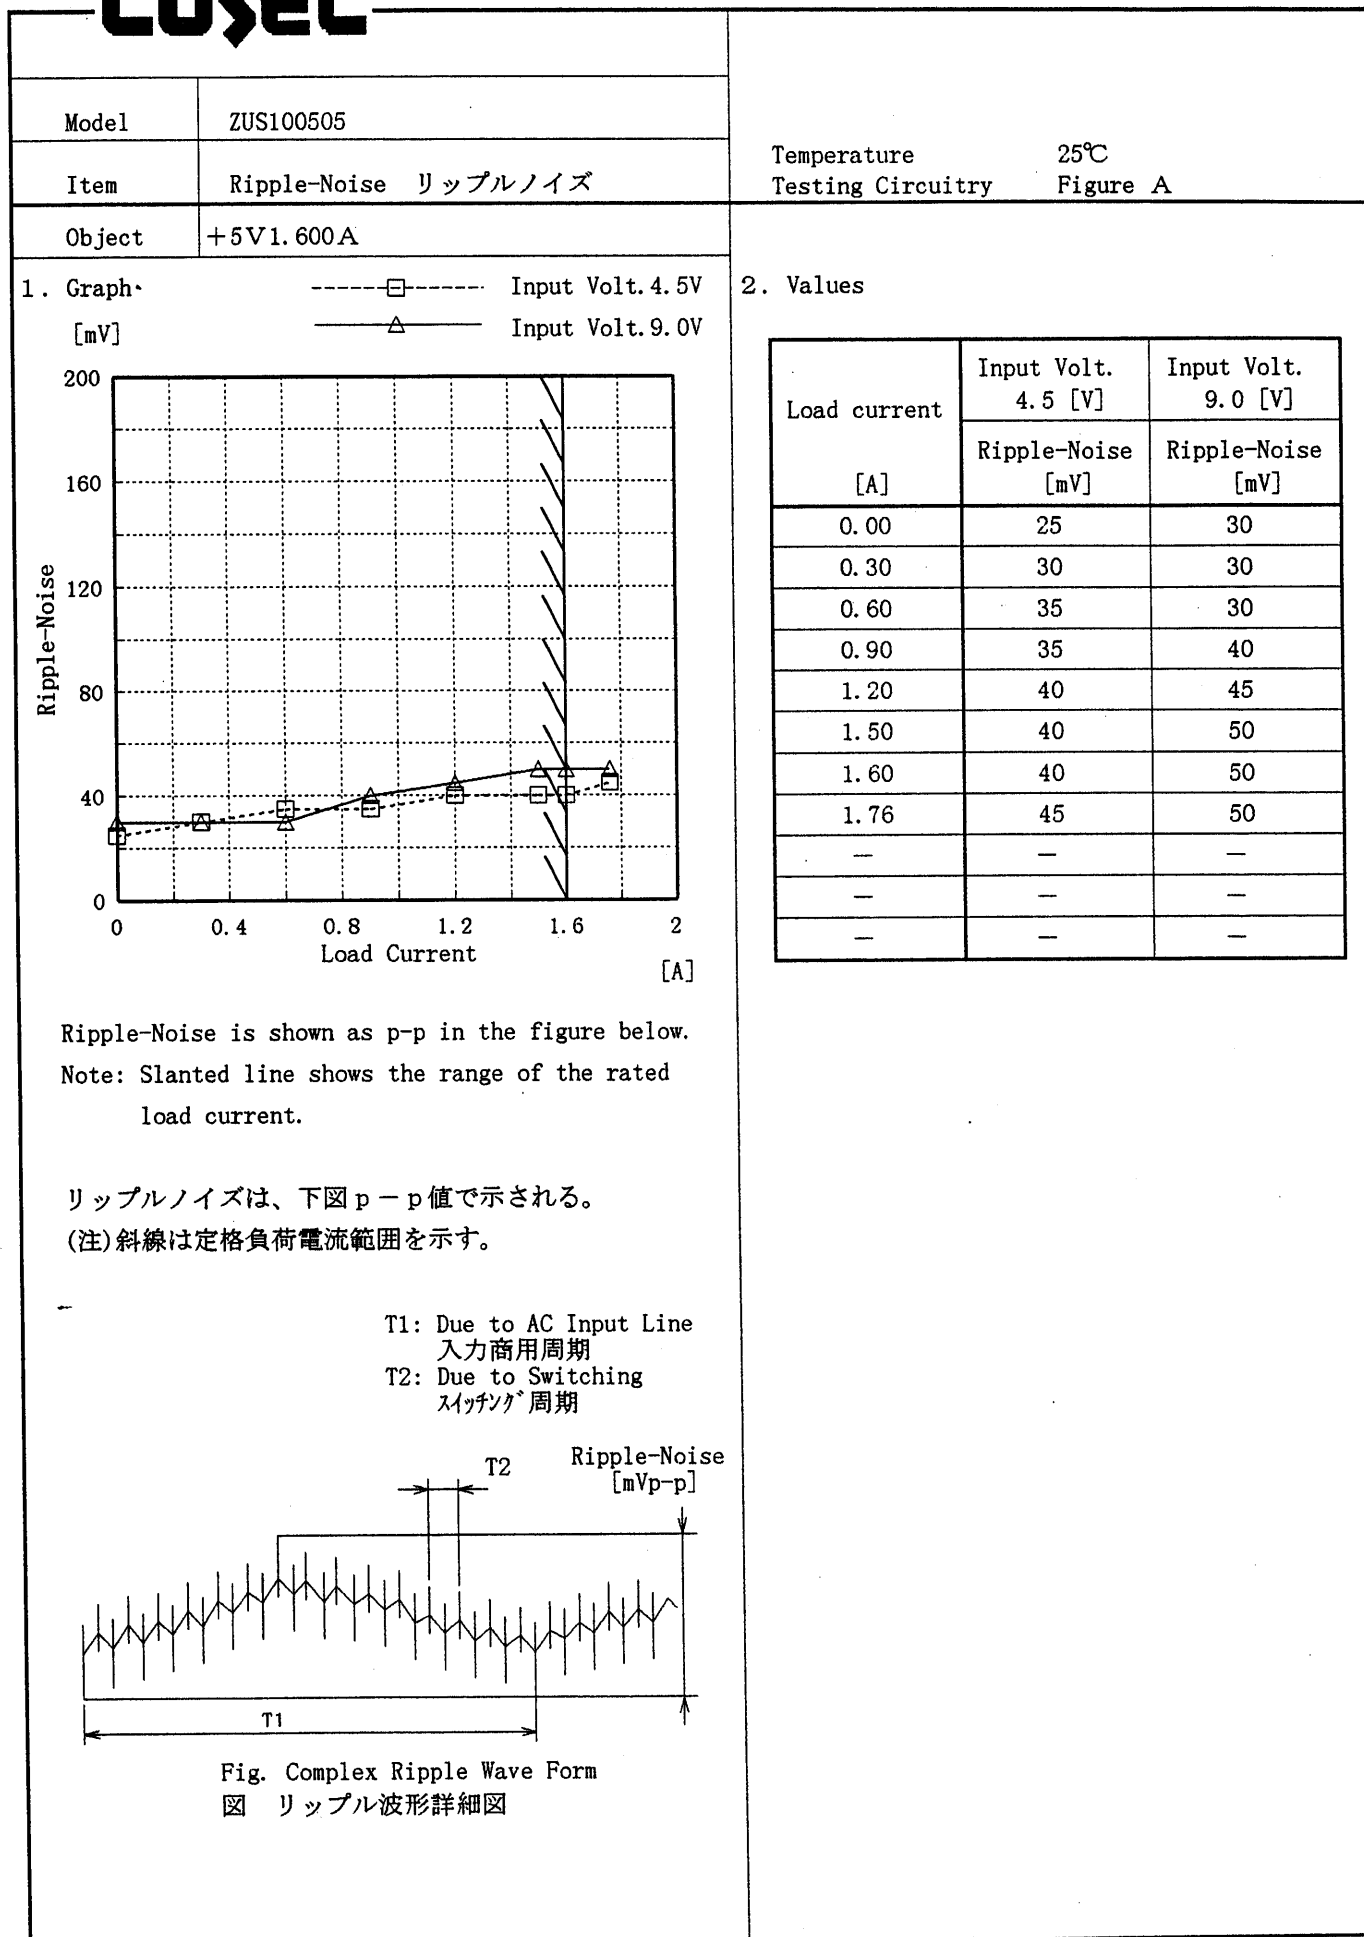

COSEL

Model	ZUS100505																																																										
Item	Overcurrent Protection 過電流保護	Temperature 25℃ Testing Circuitry Figure A																																																									
Object	+5V1.600A																																																										
1. Graph		2. Values																																																									
<div><div>~~~~~ Input Volt. 4.5V</div><div>——— Input Volt. 5.0V</div><div>———— Input Volt. 9.0V</div></div> <div><div>Output Voltage [V]</div><div>8</div><div>6</div><div>4</div><div>2</div><div>0</div><div>0</div><div>1</div><div>2</div><div>3</div><div>Load Current [A]</div></div>		<table><tr><th rowspan="2">Output Voltage [V]</th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr><tr><th>Load Current [A]</th><th>Load Current [A]</th><th>Load Current [A]</th></tr><tr><td>5.00</td><td>1.94</td><td>2.00</td><td>2.04</td></tr><tr><td>4.75</td><td>1.99</td><td>2.05</td><td>2.10</td></tr><tr><td>4.50</td><td>2.04</td><td>2.10</td><td>2.15</td></tr><tr><td>4.00</td><td>2.15</td><td>2.21</td><td>2.27</td></tr><tr><td>3.50</td><td>2.27</td><td>2.33</td><td>2.39</td></tr><tr><td>3.00</td><td>2.37</td><td>2.42</td><td>2.47</td></tr><tr><td>2.50</td><td>2.34</td><td>2.37</td><td>2.39</td></tr><tr><td>2.00</td><td>2.26</td><td>2.27</td><td>2.25</td></tr><tr><td>1.50</td><td>2.19</td><td>2.25</td><td>2.19</td></tr><tr><td>1.00</td><td>2.15</td><td>2.31</td><td>2.25</td></tr><tr><td>0.50</td><td>2.25</td><td>2.44</td><td>2.39</td></tr><tr><td>0.00</td><td>2.53</td><td>2.67</td><td>2.83</td></tr></table>			Output Voltage [V]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Load Current [A]	Load Current [A]	Load Current [A]	5.00	1.94	2.00	2.04	4.75	1.99	2.05	2.10	4.50	2.04	2.10	2.15	4.00	2.15	2.21	2.27	3.50	2.27	2.33	2.39	3.00	2.37	2.42	2.47	2.50	2.34	2.37	2.39	2.00	2.26	2.27	2.25	1.50	2.19	2.25	2.19	1.00	2.15	2.31	2.25	0.50	2.25	2.44	2.39	0.00	2.53	2.67	2.83
Output Voltage [V]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]																																																								
	Load Current [A]	Load Current [A]	Load Current [A]																																																								
5.00	1.94	2.00	2.04																																																								
4.75	1.99	2.05	2.10																																																								
4.50	2.04	2.10	2.15																																																								
4.00	2.15	2.21	2.27																																																								
3.50	2.27	2.33	2.39																																																								
3.00	2.37	2.42	2.47																																																								
2.50	2.34	2.37	2.39																																																								
2.00	2.26	2.27	2.25																																																								
1.50	2.19	2.25	2.19																																																								
1.00	2.15	2.31	2.25																																																								
0.50	2.25	2.44	2.39																																																								
0.00	2.53	2.67	2.83																																																								
Note: Slanted line shows the range of the rated load current.																																																											
(注)斜線は定格負荷電流範囲を示す。																																																											

COSEL

Model	ZUS100505
Item	Dynamic Load Response 動的負荷変動
Object	+5V1.600A



Temperature 25°C
Testing Circuitry Figure A

Input Volt. 5 V
Cycle 100 mS

Load Current



Min. Load ↔
Load 100 %

200 mV/div

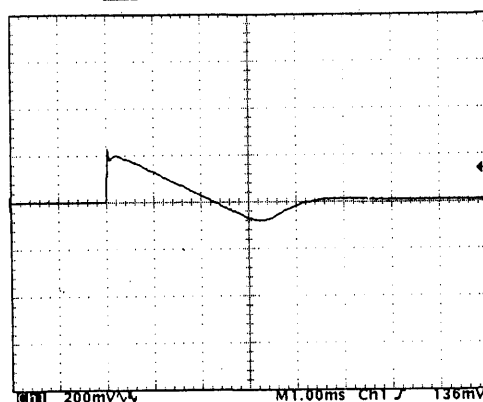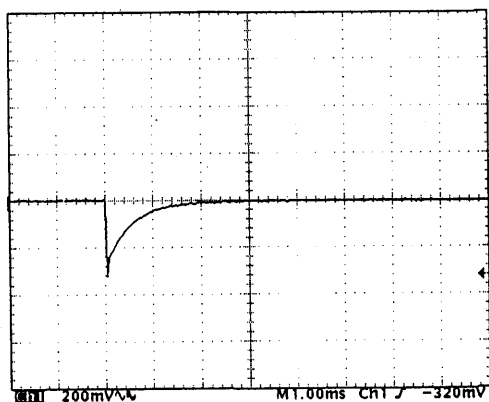



Min. Load ↔
Load 50 %

200 mV/div

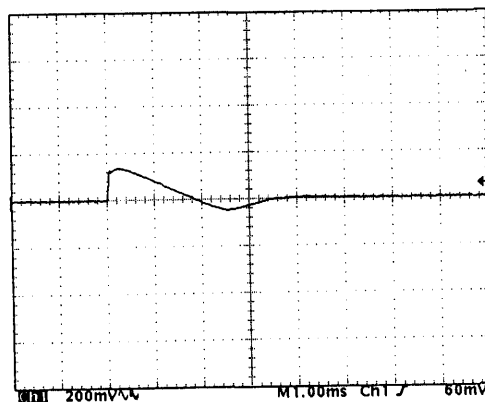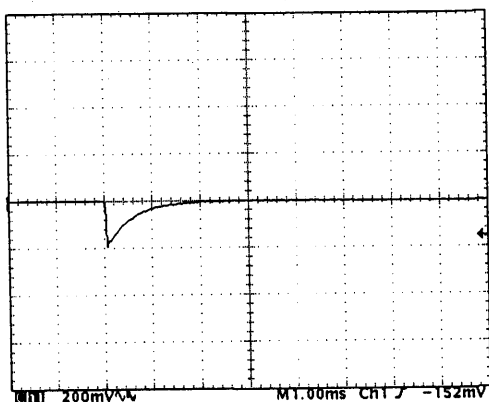

Load 50% ↔
Load 100 %

200 mV/div

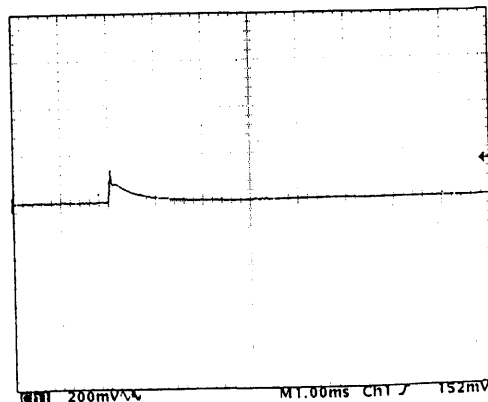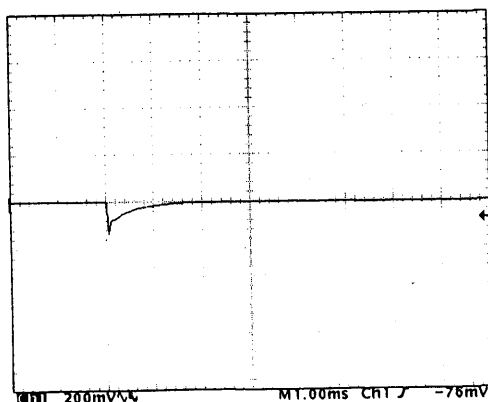


1 mS/div

COSEL

Model	ZUS100505	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+5V1.600A		

1. Graph


Input Volt. 4.5 V

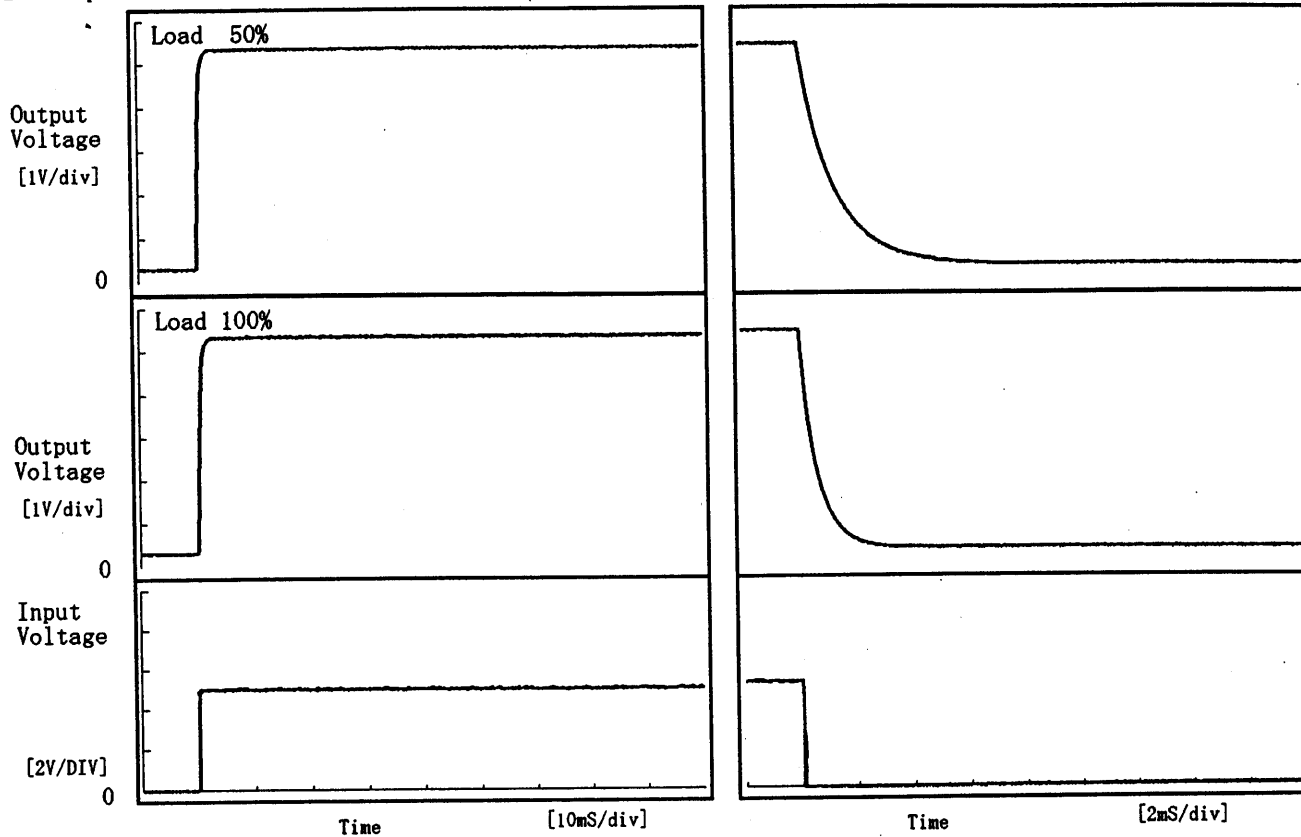

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.30	0.60	0.90	0.20	2.91
100 %	0.25	0.75	1.00	0.09	1.44

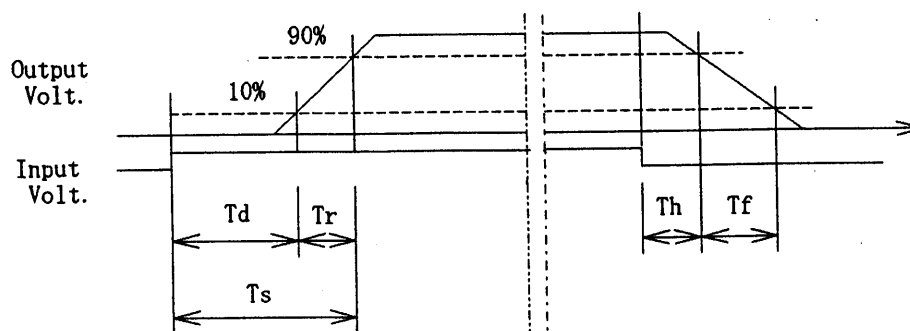


COSEL

Model ZUS100505
 Item Ambient Temperature Drift
 周囲温度変動
 Object +5V1.600A

Testing Circuitry Figure A

1. Graph

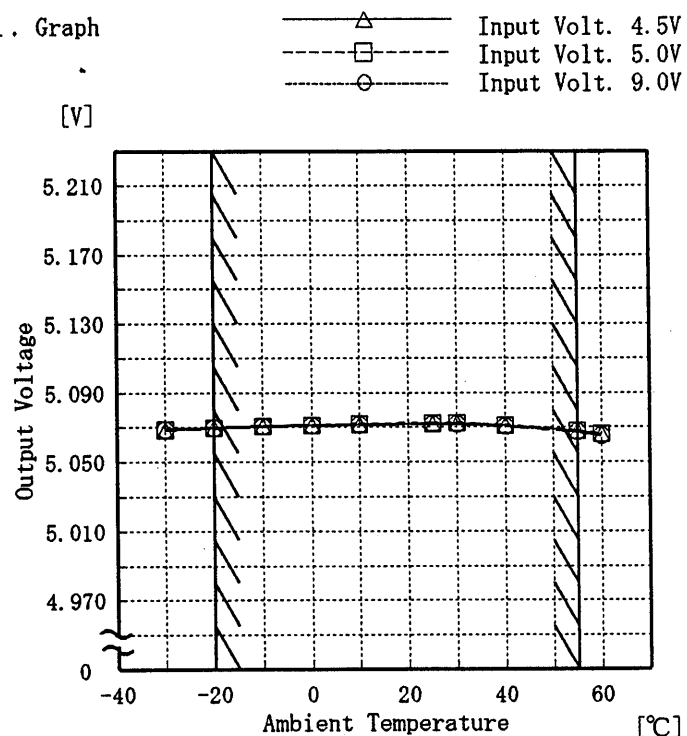

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Temperature [°C]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	5.068	5.069	5.069
-20	5.069	5.070	5.070
-10	5.071	5.071	5.071
0	5.071	5.071	5.071
10	5.072	5.072	5.072
25	5.072	5.072	5.072
30	5.073	5.072	5.072
40	5.071	5.071	5.070
55	5.068	5.068	5.067
60	5.066	5.066	5.065
—	—	—	—

COSEL


Model ZUS100505

Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object +5V1.600A

Testing Circuitry Figure A

1. Graph

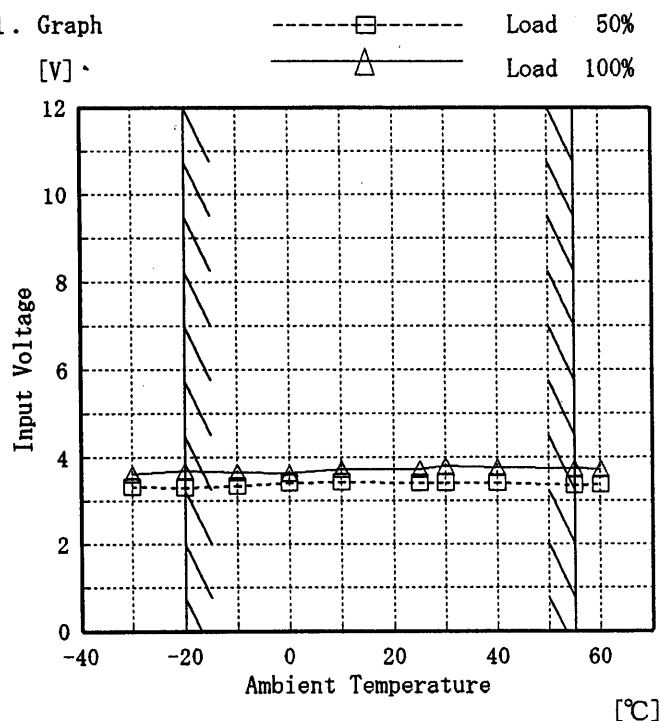

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp.	Load 50%	Load 100%
[°C]	Input Volt. [V]	Input Volt. [V]
-30	3.3	3.6
-20	3.3	3.7
-10	3.3	3.7
0	3.4	3.6
10	3.4	3.7
25	3.4	3.7
30	3.4	3.8
40	3.4	3.8
55	3.4	3.8
60	3.4	3.7
—	—	—

COSEL


Model ZUS100505

Item Ripple Voltage (by Ambient Temp.)
リップル電圧 (周囲温度特性)

Object +5 V 1.600 A

Testing Circuitry Figure A

1. Graph

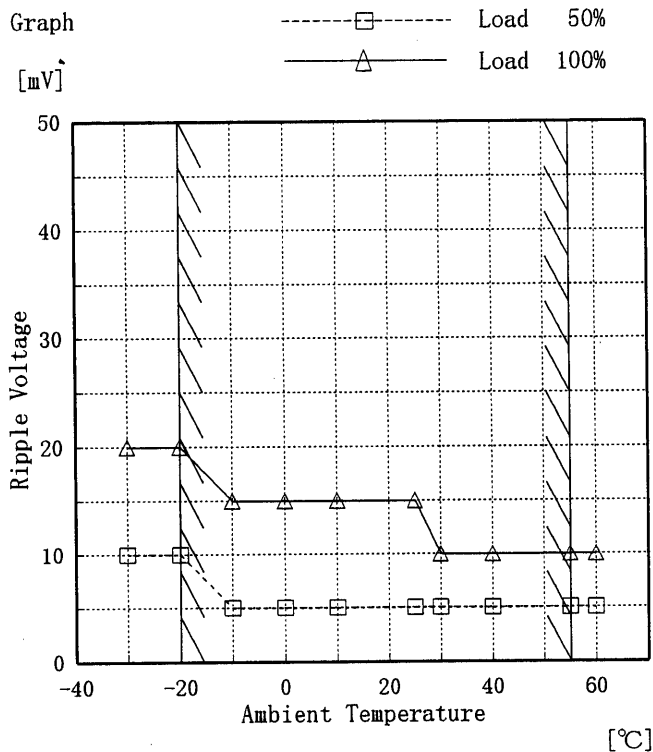

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-30	10	20
-20	10	20
-10	5	15
0	5	15
10	5	15
25	5	15
30	5	10
40	5	10
55	5	10
60	5	10
—	—	—

COSEL


Model ZUS100505

Item Time Lapse Drift 経時ドリフト

Object +5V1.600A

Temperature 25 °C
Testing Circuitry Figure A

1. Graph

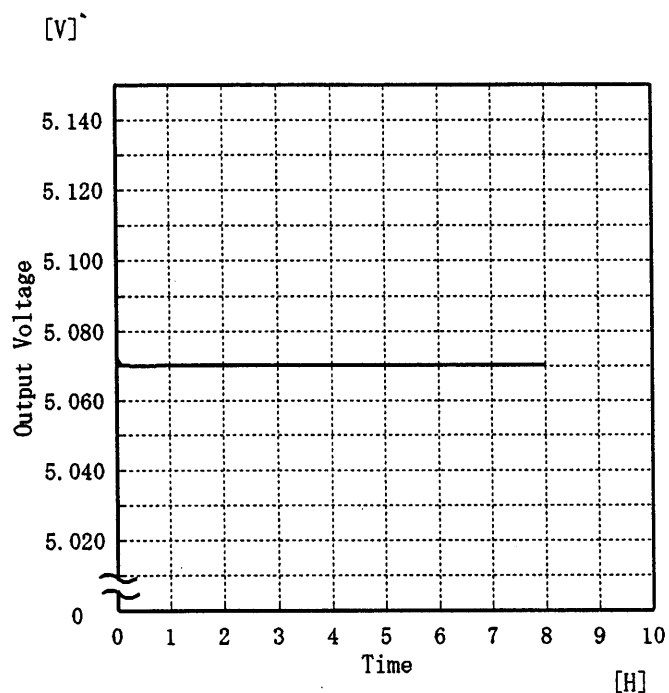

2. Values

Time since start [H]	Output Voltage [V]
0.0	5.073
0.5	5.070
1.0	5.070
2.0	5.070
3.0	5.070
4.0	5.070
5.0	5.070
6.0	5.070
7.0	5.070
8.0	5.070

COSEL

Model		ZUS100505	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+5V1.600A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 4.5~9.0 V

Load Current : 0.000~1.600 A

$$* \text{ Output Voltage Accuracy} = \pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$$

$$* \text{ Output Voltage Accuracy (Ratio)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 4.5~9.0 V

負荷電流 : 0.000~1.600 A

$$* \text{ 定電圧精度(変動値)} = \pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$$

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ratio) [%]
Maximum Voltage	25	9.0	0.000	5.078	±7	±0.2
Minimum Voltage	55	4.5	1.600	5.065		

COSEL

Model	ZUS100505	Testing Circuitry Figure A
Item	Condensation 結露特性	
Object	+5V1.600A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	5.071	10	40
	2	5.070	10	40
	3	5.070	10	40
Load 100 %	1	5.067	10	30
	2	5.067	10	30
	3	5.067	10	30

Input Volt. 5.0 V

COSEL

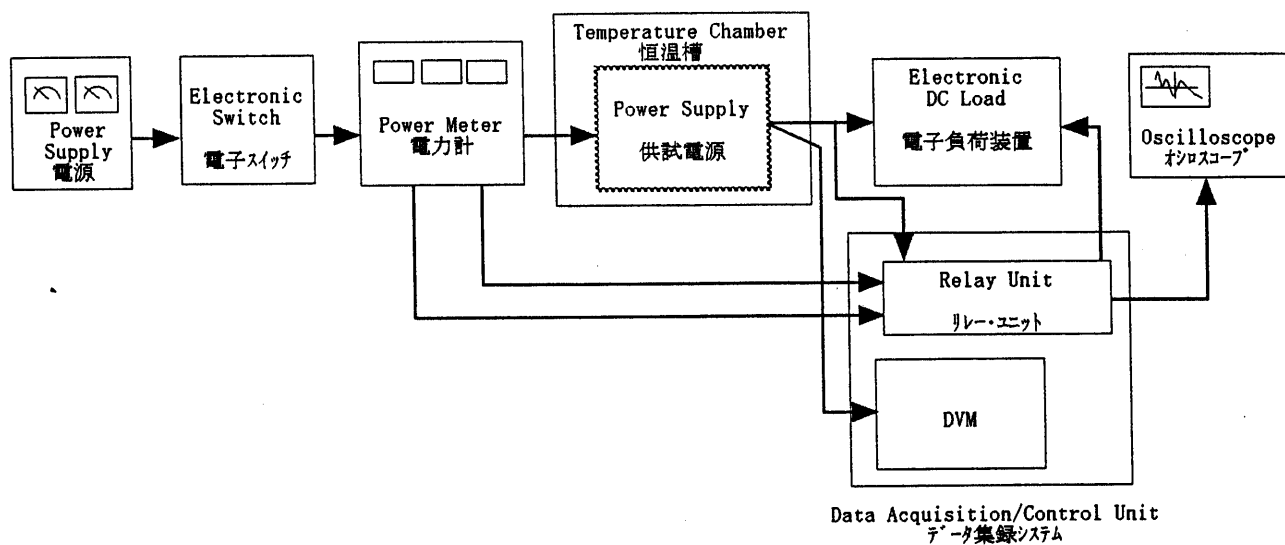


Figure A