

TEST DATA OF LHP150F-36-Y

Regulated DC Power Supply
April 5, 2021

Approved by : Junya Kaneda
Design Manager

Prepared by : Yasushi Fukumura
Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Load Current)	1
2.Efficiency (by Load Current)	2
3.Power Factor (by Load Current)	3
4.Inrush Current	4
5.Leakage Current	5
6.Line Regulation	6
7.Load Regulation	7
8.Ripple-Noise	7
9.Dynamic Load Response	8
10.Rise and Fall Time	9
11.Hold-Up Time	10
12.Instantaneous Interruption Compensation	11
13.Overcurrent Protection	12
14.Ambient Temperature Drift	13
15.Minimum Input Voltage for Regulated Output Voltage	13
16.Overvoltage Protection	13
17.Figure of Testing Circuitry	14

(Final Page 15)

COSEL

Model	LHP150F-36-Y																																					
Item	Input Current (by Load Current)	Temperature Testing Circuitry	25°C Figure A																																			
Object	_____																																					
1.Graph	<p>—△— Input Volt. 100V - - □ - - Input Volt. 200V - · ○ - - Input Volt. 230V</p> <table border="1"> <caption>Data points estimated from Figure A</caption> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 100V [A]</th> <th>Input Volt. 200V [A]</th> <th>Input Volt. 230V [A]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.065</td><td>0.065</td><td>0.071</td></tr> <tr><td>0.80</td><td>0.353</td><td>0.231</td><td>0.221</td></tr> <tr><td>1.60</td><td>0.651</td><td>0.367</td><td>0.340</td></tr> <tr><td>2.40</td><td>0.956</td><td>0.508</td><td>0.460</td></tr> <tr><td>3.20</td><td>1.265</td><td>0.651</td><td>0.583</td></tr> <tr><td>4.00</td><td>1.576</td><td>0.798</td><td>0.709</td></tr> <tr><td>4.20</td><td>1.654</td><td>0.836</td><td>0.741</td></tr> <tr><td>4.62</td><td>1.820</td><td>0.914</td><td>0.808</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 100V [A]	Input Volt. 200V [A]	Input Volt. 230V [A]	0.00	0.065	0.065	0.071	0.80	0.353	0.231	0.221	1.60	0.651	0.367	0.340	2.40	0.956	0.508	0.460	3.20	1.265	0.651	0.583	4.00	1.576	0.798	0.709	4.20	1.654	0.836	0.741	4.62	1.820	0.914	0.808	2.Values
Load Current [A]	Input Volt. 100V [A]	Input Volt. 200V [A]	Input Volt. 230V [A]																																			
0.00	0.065	0.065	0.071																																			
0.80	0.353	0.231	0.221																																			
1.60	0.651	0.367	0.340																																			
2.40	0.956	0.508	0.460																																			
3.20	1.265	0.651	0.583																																			
4.00	1.576	0.798	0.709																																			
4.20	1.654	0.836	0.741																																			
4.62	1.820	0.914	0.808																																			

Note: Slanted line shows the range of the rated load current.

Load Current [A]	Input Current [A]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	0.065	0.065	0.071
0.80	0.353	0.231	0.221
1.60	0.651	0.367	0.340
2.40	0.956	0.508	0.460
3.20	1.265	0.651	0.583
4.00	1.576	0.798	0.709
4.20	1.654	0.836	0.741
4.62	1.820	0.914	0.808
--	-	-	-
--	-	-	-
--	-	-	-

COSEL


Model	LHP150F-36-Y																													
Item	Efficiency (by Load Current)	Temperature Testing Circuitry	25°C Figure A																											
Object	_____																													
1.Graph	<p>—△— Input Volt. 100V - - □ - - Input Volt. 200V - · ○ - - Input Volt. 230V</p> <table border="1"> <caption>Data points estimated from Figure A graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Efficiency [100V] (%)</th> <th>Efficiency [200V] (%)</th> <th>Efficiency [230V] (%)</th> </tr> </thead> <tbody> <tr><td>1.0</td><td>84.1</td><td>85.0</td><td>85.2</td></tr> <tr><td>2.0</td><td>89.1</td><td>90.2</td><td>90.2</td></tr> <tr><td>3.0</td><td>90.5</td><td>91.7</td><td>91.9</td></tr> <tr><td>4.0</td><td>91.2</td><td>92.5</td><td>92.7</td></tr> <tr><td>4.20</td><td>91.4</td><td>92.9</td><td>93.0</td></tr> <tr><td>4.62</td><td>91.4</td><td>93.0</td><td>93.1</td></tr> </tbody> </table>	Load Current [A]	Efficiency [100V] (%)	Efficiency [200V] (%)	Efficiency [230V] (%)	1.0	84.1	85.0	85.2	2.0	89.1	90.2	90.2	3.0	90.5	91.7	91.9	4.0	91.2	92.5	92.7	4.20	91.4	92.9	93.0	4.62	91.4	93.0	93.1	2.Values
Load Current [A]	Efficiency [100V] (%)	Efficiency [200V] (%)	Efficiency [230V] (%)																											
1.0	84.1	85.0	85.2																											
2.0	89.1	90.2	90.2																											
3.0	90.5	91.7	91.9																											
4.0	91.2	92.5	92.7																											
4.20	91.4	92.9	93.0																											
4.62	91.4	93.0	93.1																											

Note: Slanted line shows the range of the rated load current.

Load Current [A]	Efficiency [%]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	-	-	-
0.80	84.1	85.0	85.2
1.60	89.1	90.2	90.2
2.40	90.5	91.7	91.9
3.20	91.2	92.5	92.7
4.00	91.4	92.8	93.0
4.20	91.4	92.9	93.0
4.62	91.4	93.0	93.1
--	-	-	-
--	-	-	-
--	-	-	-

COSEL

Model	LHP150F-36-Y
Item	Power Factor (by Load Current)
Object	_____

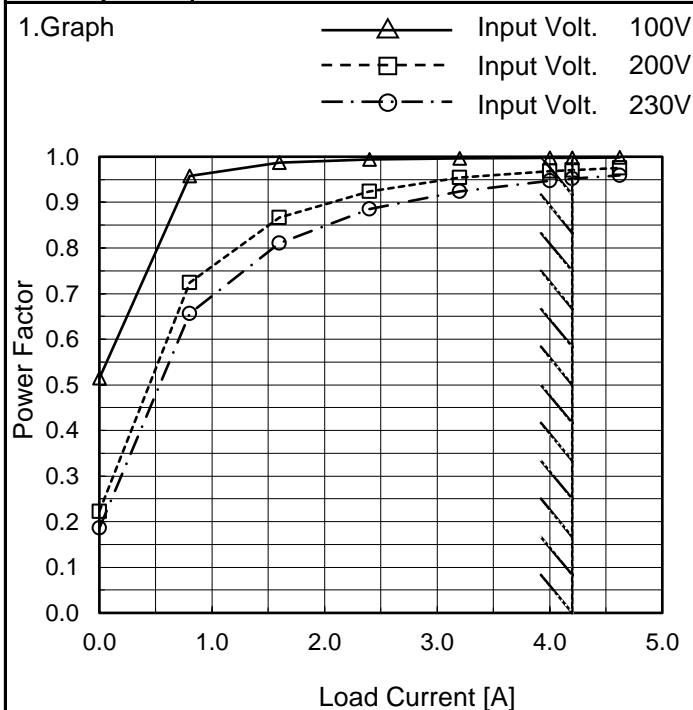

Note: Slanted line shows the range of the rated load current.




Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current [A]	Power Factor		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	0.514	0.223	0.186
0.80	0.958	0.724	0.656
1.60	0.988	0.866	0.811
2.40	0.994	0.924	0.885
3.20	0.996	0.954	0.924
4.00	0.997	0.969	0.947
4.20	0.998	0.971	0.952
4.62	0.998	0.975	0.959
--	-	-	-
--	-	-	-
--	-	-	-

COSEL

Model	LHP150F-36-Y	Temperature	25°C
Item	Inrush Current	Testing Circuitry	Figure A
Object	_____		

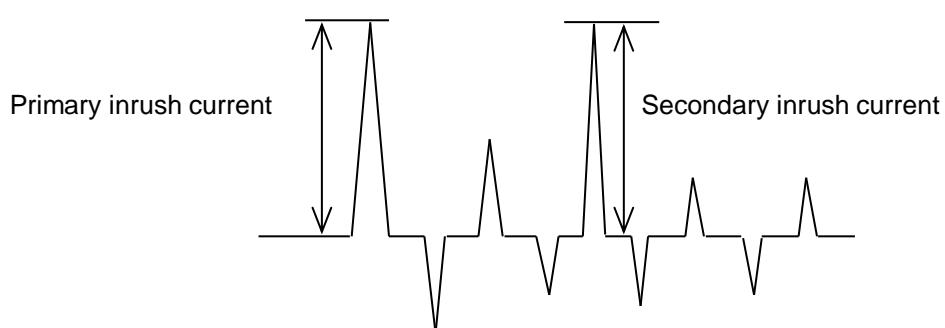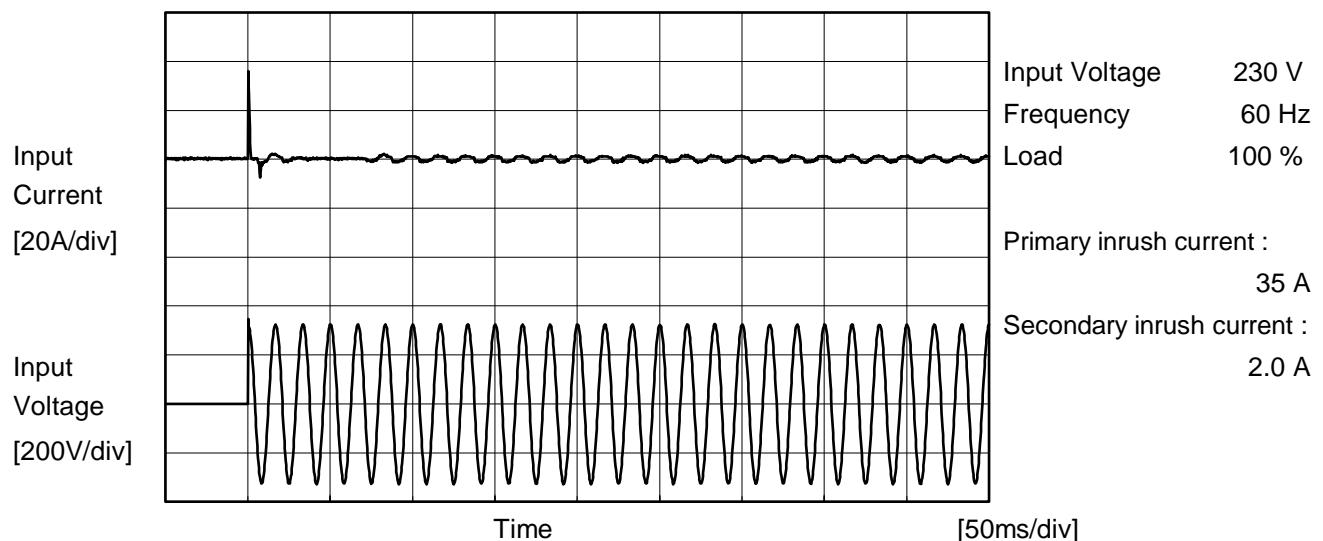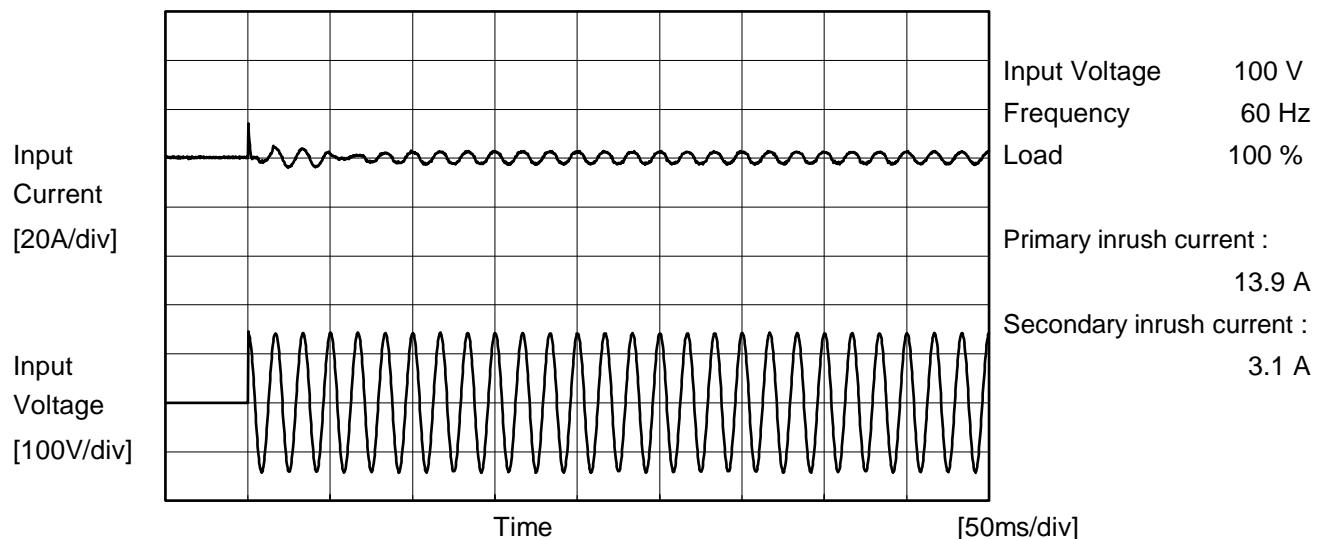



Model	LHP150F-36-Y	Temperature	25°C
Item	Leakage Current	Testing Circuitry	Figure C
Object	_____		

1. Results

[mA]

Standards	Testing Circuitry	Measuring Method	Input Volt.			Note
			100 [V]	230 [V]	240 [V]	
DEN-AN	Figure C-1	Both phases	0.15	0.36	0.37	Operation
		One of phases	0.27	0.64	0.70	Stand by
IEC62368-1	Figure C-2	Both phases	0.13	0.34	0.35	Operation
		One of phases	0.25	0.64	0.67	Stand by
	Figure C-3	Both phases	0.13	0.33	0.34	Operation
		One of phases	0.25	0.62	0.65	Stand by

The value for "One of phases" is the reference value only.

2. Condition


Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

COSEL

Model	LHP150F-36-Y
Item	Line Regulation
Object	+36V4.2A

Temperature 25°C
Testing Circuitry Figure A

1.Graph


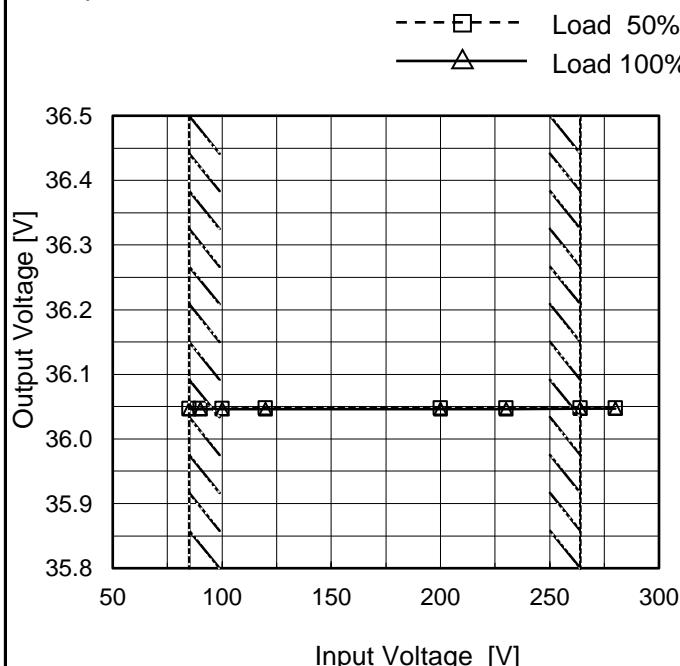


2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
85	36.047	36.046
90	36.047	36.046
100	36.047	36.046
120	36.047	36.046
200	36.048	36.046
230	36.048	36.047
264	36.048	36.047
280	36.048	36.047
--	-	-

Note: Slanted line shows the range of the rated input voltage.

COSEL

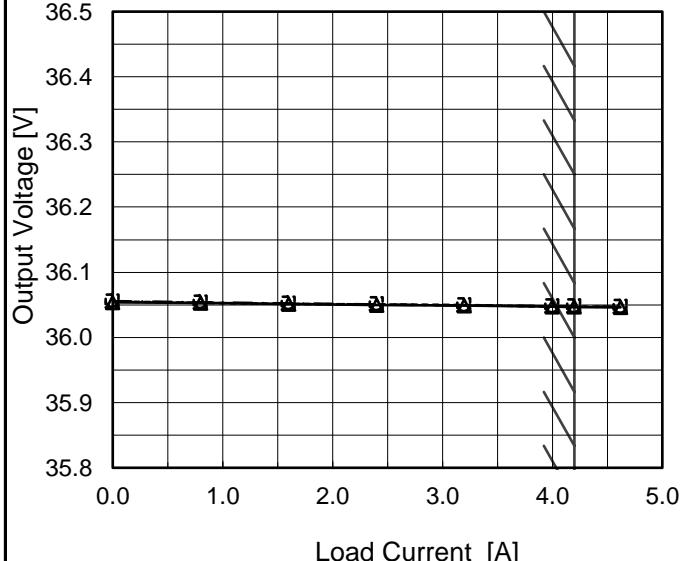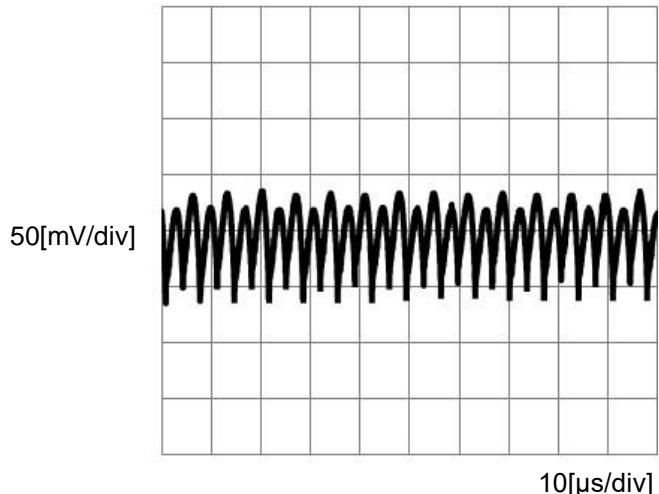Model	LHP150F-36-Y	Temperature 25°C																																																			
Item	Load Regulation	Testing Circuitry Figure A																																																			
Object	+36V4.2A																																																				
1.Graph	<p>—△— Input Volt. 100V - - - □ - - Input Volt. 200V - - ○ - - Input Volt. 230V</p>  <p>Note: Slanted line shows the range of the rated load current.</p>	2.Values																																																			
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 100[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>36.054</td><td>36.055</td><td>36.056</td></tr> <tr> <td>0.80</td><td>36.053</td><td>36.053</td><td>36.054</td></tr> <tr> <td>1.60</td><td>36.051</td><td>36.052</td><td>36.053</td></tr> <tr> <td>2.40</td><td>36.050</td><td>36.051</td><td>36.051</td></tr> <tr> <td>3.20</td><td>36.049</td><td>36.050</td><td>36.049</td></tr> <tr> <td>4.00</td><td>36.047</td><td>36.048</td><td>36.048</td></tr> <tr> <td>4.20</td><td>36.047</td><td>36.047</td><td>36.047</td></tr> <tr> <td>4.62</td><td>36.046</td><td>36.047</td><td>36.047</td></tr> <tr> <td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr> <td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr> <td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>	Load Current [A]	Output Voltage [V]			Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]	0.00	36.054	36.055	36.056	0.80	36.053	36.053	36.054	1.60	36.051	36.052	36.053	2.40	36.050	36.051	36.051	3.20	36.049	36.050	36.049	4.00	36.047	36.048	36.048	4.20	36.047	36.047	36.047	4.62	36.046	36.047	36.047	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Output Voltage [V]																																																				
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]																																																		
0.00	36.054	36.055	36.056																																																		
0.80	36.053	36.053	36.054																																																		
1.60	36.051	36.052	36.053																																																		
2.40	36.050	36.051	36.051																																																		
3.20	36.049	36.050	36.049																																																		
4.00	36.047	36.048	36.048																																																		
4.20	36.047	36.047	36.047																																																		
4.62	36.046	36.047	36.047																																																		
--	--	--	--																																																		
--	--	--	--																																																		
--	--	--	--																																																		
Item	Ripple-Noise	Temperature 25°C																																																			
Object	+36V4.2A	Testing Circuitry Figure B																																																			
1.Graph	<p>Input Voltage 230V Load 100%</p> 																																																				

COSEL

Model	LHP150F-36-Y	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+36V4.2A		

Input Volt. 230 V Response. $t_1=t_2=50\mu s$. Typ
 Cycle 1000 ms



Load 0%(0A) \longleftrightarrow
 Load 100%(4.2A)

200[mV/div]

20[ms/div]

20[ms/div]

Load 50%(2.1A) \longleftrightarrow
 Load 100%(4.2A)

200[mV/div]

20[ms/div]


20[ms/div]

COSEL

Model	LHP150F-36-Y
Item	Rise and Fall Time
Object	+36V4.2A

Temperature
Testing Circuitry 25°C
Figure A


1.Graph

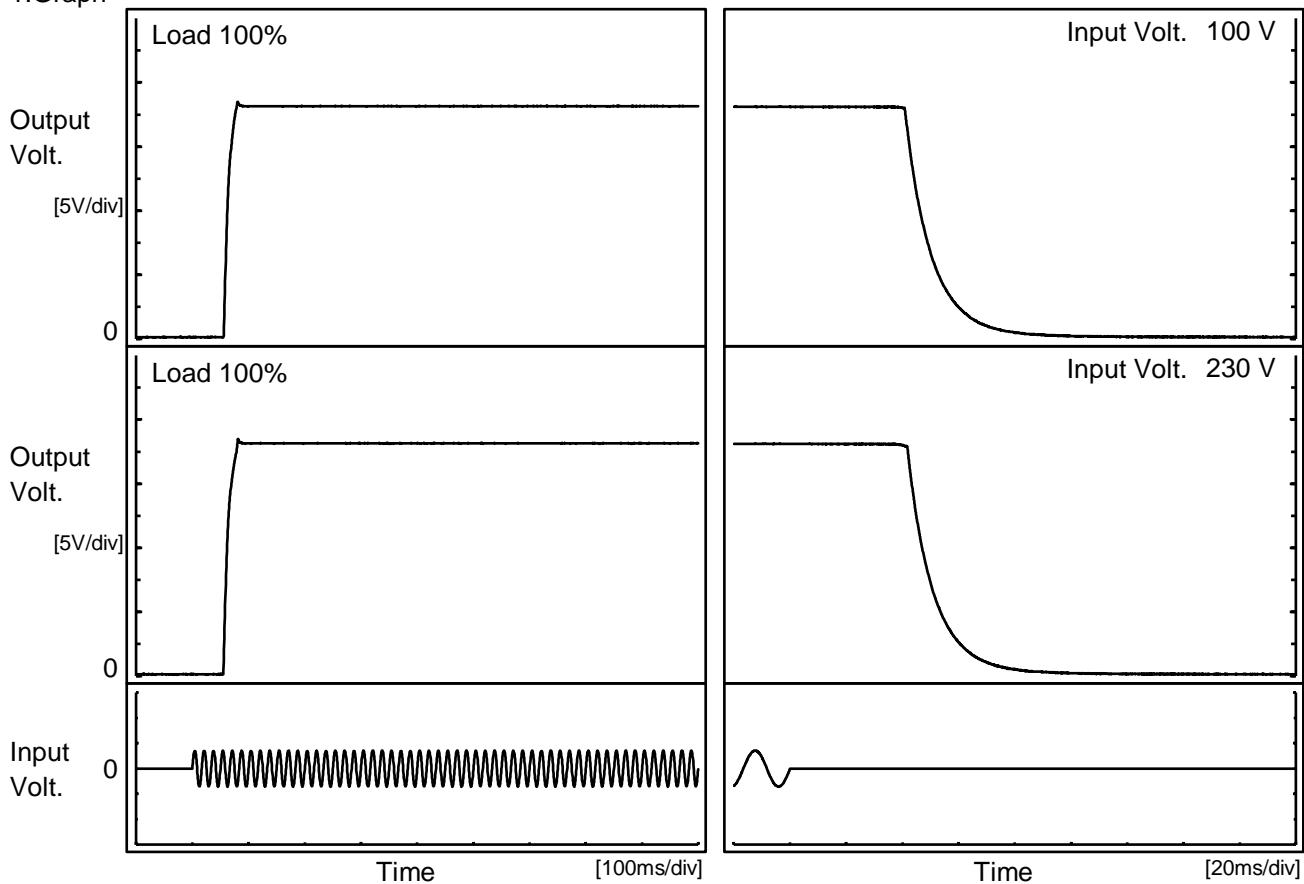

2.Values

[ms]

Input Volt.	Time	Td	Tr	Ts	Th	Tf
100 V		57.5	15.5	73.0	41.7	21.2
230 V		56.5	17.5	74.0	42.5	20.9

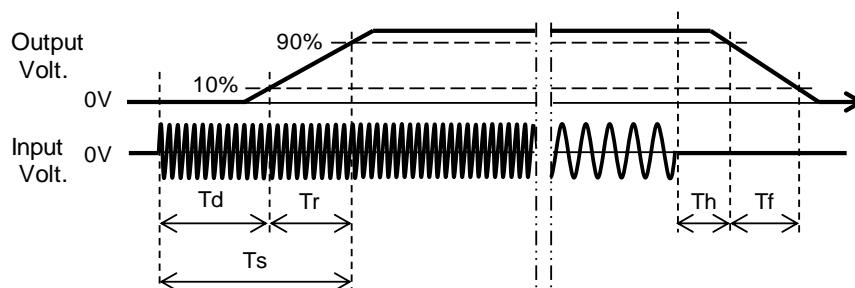


COSEL

Model	LHP150F-36-Y
-------	--------------

Item	Hold-Up Time
------	--------------

Object	+36V4.2A
--------	----------

1. Graph

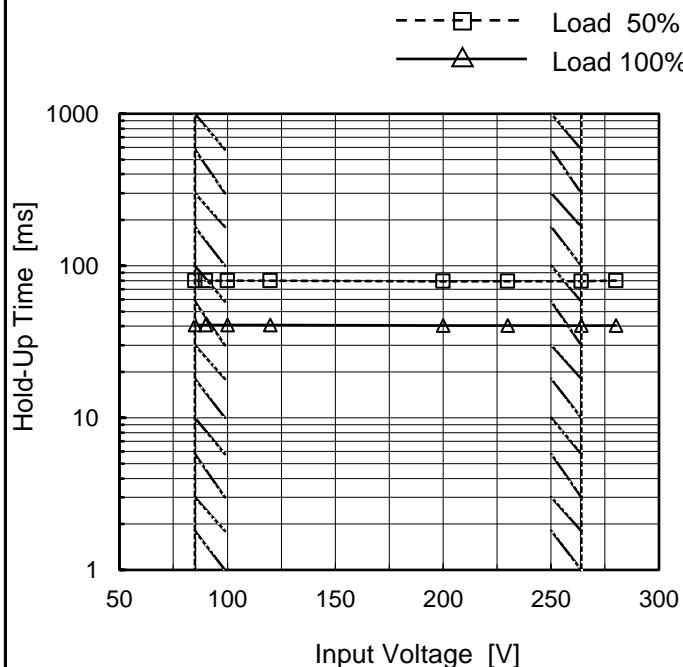

Temperature 25°C
Testing Circuitry Figure A


2. Values

Input Voltage [V]	Hold-Up Time [ms]	
	Load 50%	Load 100%
85	80	41
90	80	41
100	80	41
120	80	41
200	79	41
230	79	40
264	79	40
280	80	40
--	-	-

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.
Note: Slanted line shows the range of the rated input voltage.

COSEL

Model	LHP150F-36-Y
Item	Instantaneous Interruption Compensation
Object	+36V4.2A

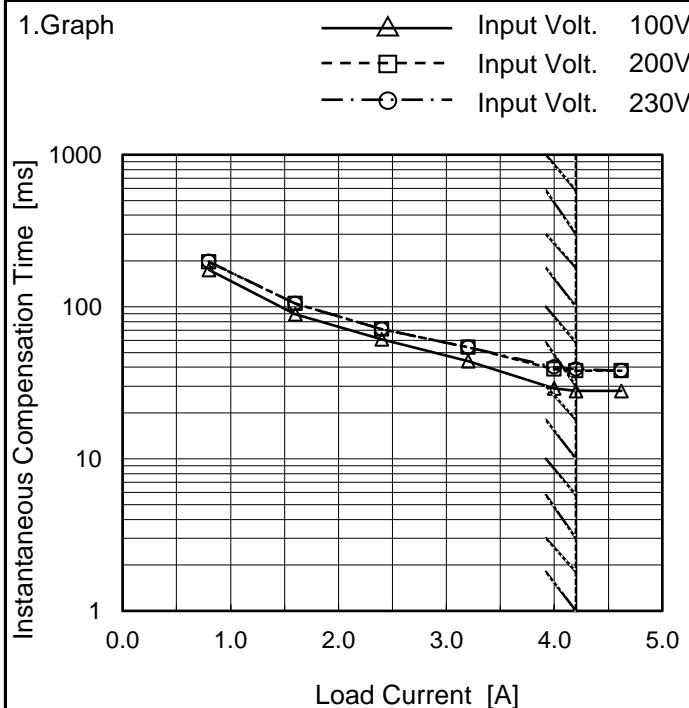

Temperature 25°C
Testing Circuitry Figure A

2. Values


Load Current [A]	Time [ms]		
	Input Volt. 100[V]	Input Volt. 200[V]	Input Volt. 230[V]
0.00	-	-	-
0.80	175	197	198
1.60	89	105	105
2.40	61	71	71
3.20	44	54	54
4.00	29	39	40
4.20	28	38	39
4.62	28	38	38
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated load current.

COSEL

Model	LHP150F-36-Y
Item	Overcurrent Protection
Object	+36V4.2A

1. Graph

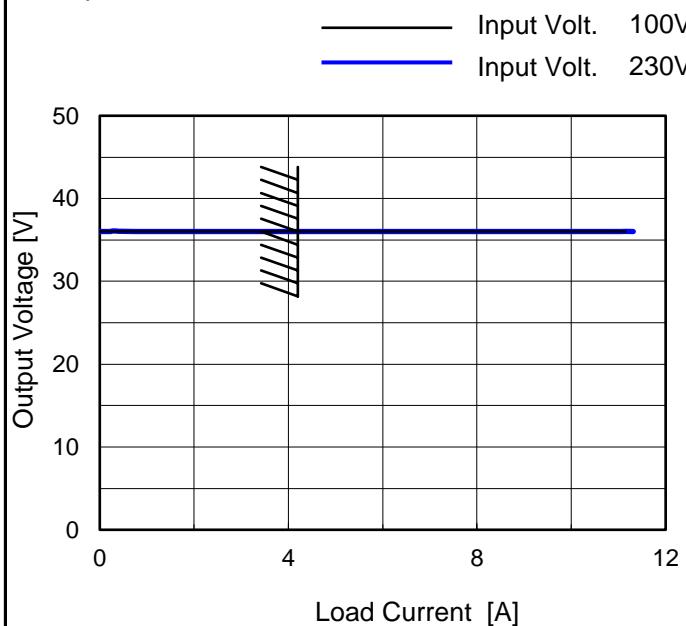

Note: Slanted line shows the range of the rated load current.

Overcurrent protection is Hiccup mode.

Temperature 25°C
Testing Circuitry Figure A

2. Values

Output Voltage [V]	Load Current [A]	
	Input Volt. 100[V]	Input Volt. 230[V]
36	11.15	11.31
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-



Model	LHP150F-36-Y
Item	Ambient Temperature Drift
Object	+36V4.2A

Testing Circuitry Figure A

1.Values

Load 100%

Ambient Temperature[°C]	Output Voltage [V]		
	Input Volt. 100V	Input Volt. 200V	Input Volt. 230V
-10	35.919	35.919	35.919
25	36.043	36.043	36.044
50	36.099	36.100	36.100

Item	Minimum Input Voltage for Regulated Output Voltage
Object	+36V4.2A

Testing Circuitry Figure A

1.Values

Ambient Temperature[°C]	Input Voltage [V]	
	Load 50%	Load 100%
-10	75	76
25	76	76
50	76	77

Item	Overvoltage Protection
Object	+36V4.2A

Testing Circuitry Figure A

1.Values

Load 0%

Ambient Temperature[°C]	Operating Point [V]	
	Input Volt. 100V	Input Volt. 230V
-10	44.68	44.61
25	46.01	46.01
50	46.99	46.99


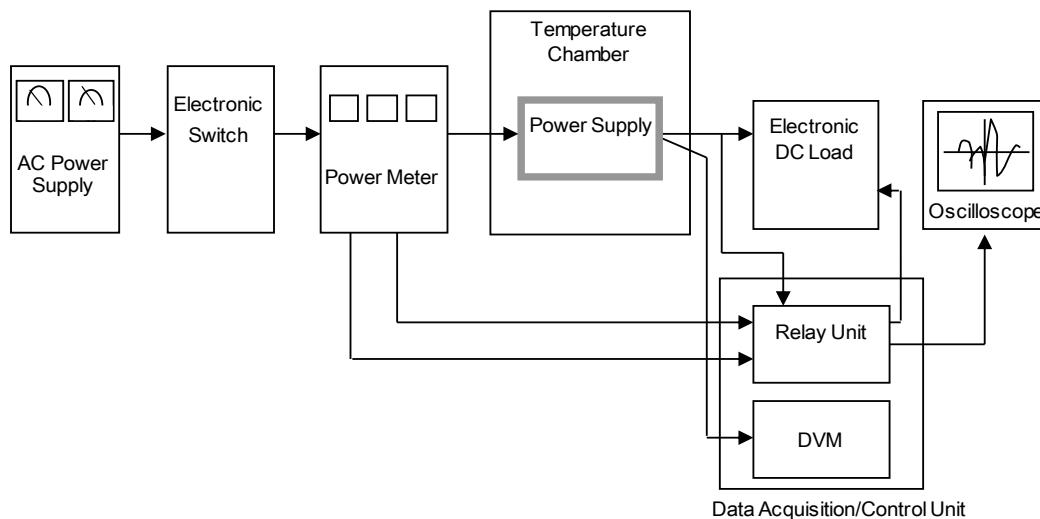


Figure A

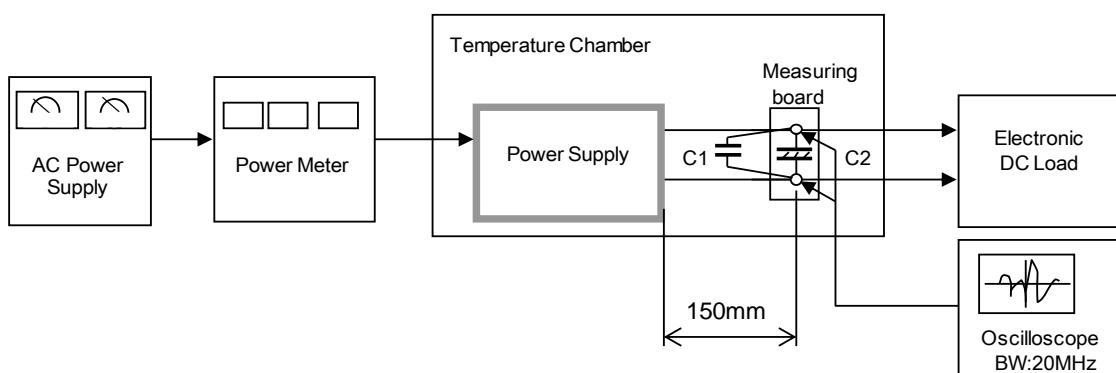

C1= 0.1 μF
(Ceramic capacitor)

C2= 22 μF
(Electrolytic capacitor)

Figure B

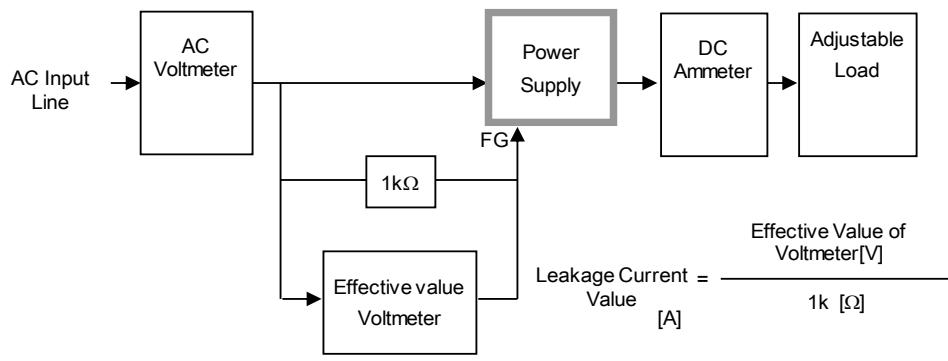


Figure C-1 (DEN-AN)

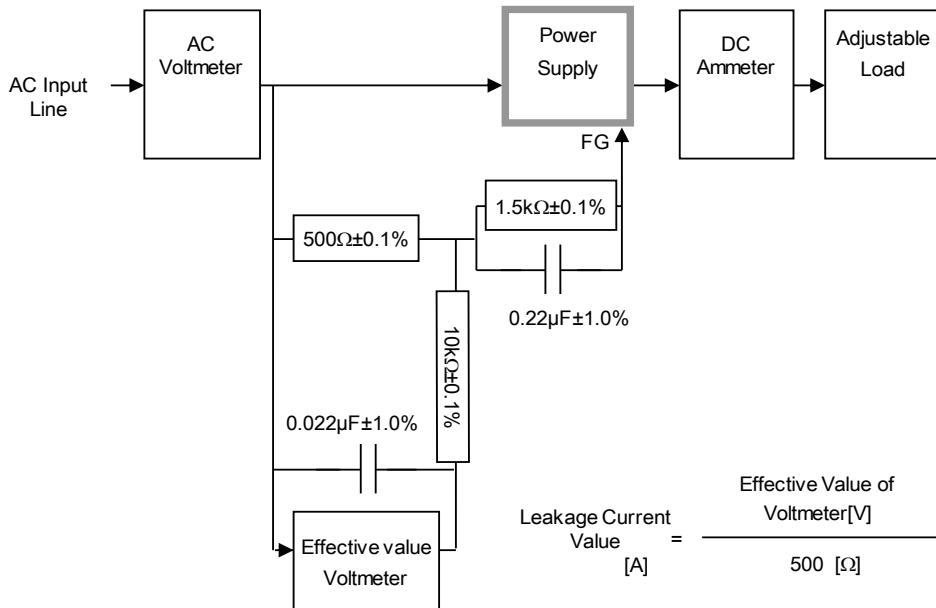


Figure C-2 (IEC62368-1 refer to IEC60990 Fig.4)

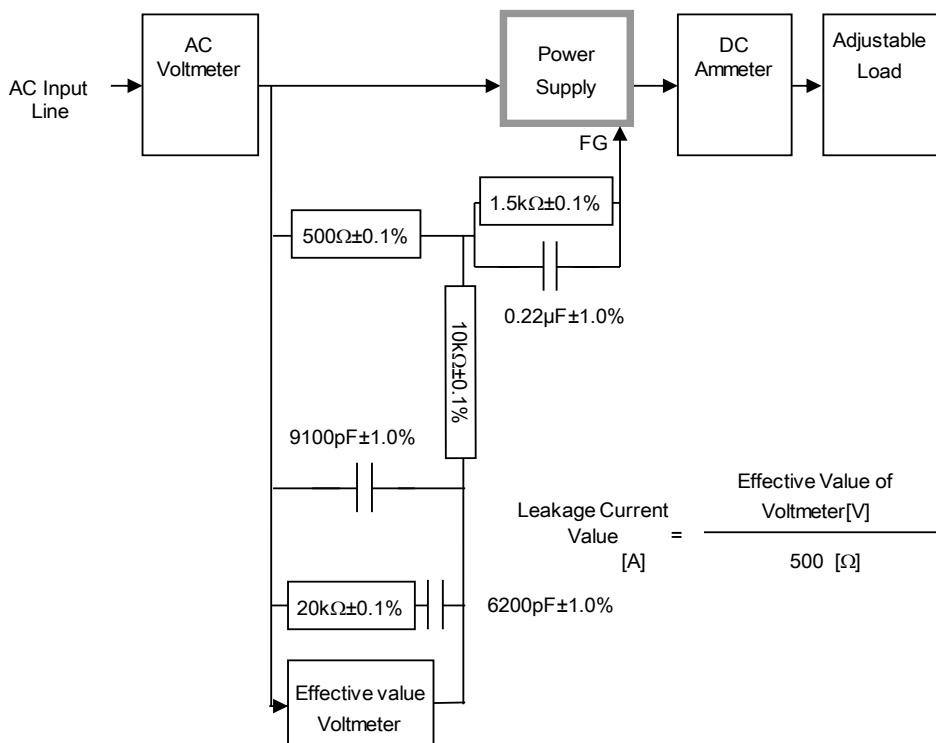


Figure C-3 (IEC62368-1 refer to IEC60990 Fig.5)